# BATHYMETRIC SURVEY SUMMARY REPORT REVISION 1

# REMEDIAL DESIGN SERVICES SWAN ISLAND BASIN PROJECT AREA CERCLA DOCKET NO. 10-2021-001

# PORTLAND HARBOR SUPERFUND SITE PORTLAND, MULTNOMAH COUNTY, OREGON

Prepared for: Swan Island Basin Remedial Design Group

Prepared by:



ETRAC, INC. 617 S. Knik-Goose Bay Rd., Ste. C, Wasilla, AK 99654

On behalf of:



11107 Sunset Hills Road, Suite 400 Reston, Virginia 20190

June 2023

#### Bathymetric Survey Summary Report Swan Island Basin Project Area Portland Harbor Superfund Site

### **Record of Changes / Summary of Revisions**

Revision No.	<b>Revision Date</b>	Document Name (If other than entire document, list revised sections or pages)
1	06/02/2023	Revisions per EPA comments received February 3, 2023.

# BATHYMETRIC SURVEY SUMMARY REPORT REVISION 1

# REMEDIAL DESIGN SWAN ISLAND BASIN PROJECT AREA CERCLA DOCKET NO. 10-2021-001

# PORTLAND HARBOR SUPERFUND SITE PORTLAND, MULTNOMAH COUNTY, OREGON

**Prepared for:** 

Swan Island Basin Remedial Design Group

**Prepared by:** 

ETRAC, INC. 617 S. Knik-Goose Bay Rd., Ste. C, Wasilla, AK 99654

On behalf of:



11107 Sunset Hills Road, Suite 400 Reston, Virginia 20190

June 2023

### TABLE OF CONTENTS

1.0	INTR	ODUCTION	1-1	
	1.1	OBJECTIVES AND SCOPE	1-1	
	1.2	PROJECT AREA BACKGROUND	1-1	
	1.3	DOCUMENT ORGANIZATION	1-2	
2.0	SURVEY ACTIVITIES1			
	2.1	MULTIBEAM BATHYMETRIC SURVEY	1	
	2.2	HORIZONTAL AND VERTICAL CONTROL CHECKS		
	2.3	CALIBRATION, VALIDATION, AND DATA PROCESSING		
3.0	SURV	YEY RESULTS SUMMARY	3-1	
	3.1	MULTIBEAM BATHYMETRY	3-1	
	3.2	SURFACE FEATURES	3-1	
	3.3	DATA GAPS IN BATHYMETRY SURVEY DATASET	3-1	
4.0	REFE	RENCES	4-1	

 Table 2-1
 Multibeam Bathymetry Survey Equipment and Calibration Check Information

#### LIST OF FIGURES

- Figure 1-1 Bathymetry Survey Area
- Figure 2-1 Multibeam Survey Lines
- Figure 2-2 Overview of Survey Control Points
- Figure 3-1 Bathymetry Overview
- Figure 3-2 Bathymetry in Zone A
- Figure 3-3 Bathymetry in Zone B
- Figure 3-4 Bathymetry in Zone C
- Figure 3-5 Bathymetry in Zone D
- Figure 3-6Bathymetry in Zone E
- Figure 3-7Bathymetry in Zone F
- Figure 3-8 Bathymetry in Zone G
- Figure 3-9 Bathymetry in Zone H
- Figure 3-10 Bathymetry in Zone I
- Figure 3-11 Bathymetry in Zone J
- Figure 3-12 Scarring and Drag Marks

#### LIST OF ATTACHMENTS

Attachment A Daily Field Reports Attachment B Electronic Data Deliverable

### LIST OF ACRONYMS AND ABBREVIATIONS

2-D	two dimensional		
3-D	three dimensional		
CRM	Colombia River Datum		
EDD EM EPA	Electronic Data Deliverable Engineer Manual U.S. Environmental Protection Agency		
ft	foot/feet		
GAMS GeoTIFF	GNSS Azimuth Measurement System Geo-referenced Tiff		
CRD	Columbia River Datum		
HGL	HydroGeoLogic, Inc.		
IMU	inertial measurement system		
LiDAR	light detection and ranging		
MBES	Multibeam EchoSounder		
PDI	Pre-Design Investigation		
RD RM RTK	Remedial Design River Mile real-time kinematic		
SBET SIB	Smoothed Best Estimate of Trajectory Swan Island Basin		
USGS	U.S. Geological Survey		

### BATHYMETRIC SURVEY SUMMARY REPORT SWAN ISLAND BASIN PROJECT AREA PORTLAND HARBOR SUPERFUND SITE PORTLAND, MULTNOMAH COUNTY, OREGON

## **1.0 INTRODUCTION**

This report presents an overview of the multibeam bathymetric survey conducted in the Swan Island Basin (SIB) Project Area of the Portland Harbor Superfund Site in Portland, Multnomah County, Oregon. The work was performed by eTrac Inc., in response to a request from HydroGeoLogic, Inc. (HGL) and on behalf of the SIB Remedial Design (RD) Group based on the requirements of the Portland Harbor Superfund Site Record of Decision (EPA, 2017) and the Administrative Settlement Agreement and Order on Consent (EPA, 2021). The scope of work was proposed in the March 2022 Pre-Design Investigation (PDI) Work Plan (HGL, 2022a), and was conditionally approved by U.S. Environmental Protection Agency on April 5, 2022. The scope of the survey remained consistent with that detailed in the final PDI Work Plan that was fully approved in May 2022. The goal of the survey was to address the data gap identified in Section 3.5 of the PDI Work Plan.

#### 1.1 OBJECTIVES AND SCOPE

Bathymetric data was collected to provide survey data for studies in support of development of the RD. This bathymetric data will fundamentally support multiple aspects of the RD. The multibeam bathymetry dataset will have multiple uses, including (1) estimating sedimentation and erosion trends based on comparisons with previous elevation data, (2) identifying debris, and (3) providing elevation data for completing a site-wide unified elevation model. The unified elevation model will be a regular grid of best-available elevations for use in performing analysis and supporting development of an updated Remedial Action concept. From this unified elevation model, transects or subsets can be extracted as needed for analysis work. Additional elevation data will be collected in the future on an as-needed basis for the purposes of supporting preliminary and final engineering design.

This data acquisition effort is intended to result in additional elevation data in the SIB using multibeam survey techniques. The extent of the multibeam bathymetry survey includes a portion of the main Willamette River channel outside of the SIB Project Area. Bathymetry in the river channel is needed to inform the development of the hydrodynamics and sediment transport model that will evaluate the exchange of sediment and water between SIB and the main river channel. Bathymetric data collection was conducted in accordance with the Survey and Quality Control Plan (Mott MacDonald, 2022) that was developed in response to U.S. Environmental Protection Agency comments on the PDI Work Plan and the Field Sampling Plan (HGL, 2022b).

### **1.2 PROJECT AREA BACKGROUND**

The SIB Project Area is between approximately River Mile (RM) 8.1 and RM 9.2 on the northeast side of the Willamette River. The multibeam bathymetry survey area encompassed a portion of the

main Willamette River Channel and the SIB. The survey area within the Willamette River Channel began at approximately RM 7.7, northwest of the SIB Project Area, and extended within the Willamette River Channel to RM 9 and within SIB to approximately RM 9.2 to collect the necessary data to support the survey objectives (Figure 1-1).

#### **1.3 DOCUMENT ORGANIZATION**

This summary documents the multibeam bathymetric survey field activities conducted at SIB and the adjacent Willamette River Channel. The report is organized into the following sections:

- Section 1 presents an overall introduction including the objectives and scope of the multibeam bathymetric survey;
- Section 2 provides a description of survey activities completed, calibration/validation procedures, and data processing;
- Section 3 provides an overview of the data collected; and
- Section 4 presents the references used in this report.

## 2.0 SURVEY ACTIVITIES

The multibeam bathymetry survey was conducted between April 4 and April 7, 2022, in accordance with the Survey and Quality Control Plan (Mott MacDonald, 2022). The survey was conducted in a manner that satisfies the data quality objectives established in the Uniform Federal Policy-Quality Assurance Project Plan for SIB (HGL, 2022c). Figure 2-1 presents the survey lines collected on this project. Attachment A includes daily field reports, including field notes and photographs.

#### 2.1 MULTIBEAM BATHYMETRIC SURVEY

The extents of the multibeam bathymetry survey are shown in Figure 1-1.

The data quality objectives for the multibeam bathymetric survey include obtaining current and accurate depth information in the river and SIB, obtaining estimated submerged riverbed elevations, covering best available upper riverbank area, and ensuring coverage within the project area everywhere except locations rendered inaccessible by unavoidable obstructions.

The riverbed surface was imaged using an R2 Sonic 2024 Multibeam EchoSounder (MBES), which deviated from the proposed R2 Sonic 2020 MBES to provide better imaging resolution. The prescribed survey accuracy goal is best feasible based on field conditions, at sampling frequency 400 kilohertz within a 656-foot (ft)<sup>1</sup> operational range (HGL, 2022c). Bathymetry data were acquired in accordance with the U.S. Army Corps of Engineers (USACE) 2013 Engineer Manual (EM) 1110-2-1003 Hydrographic Surveying (USACE, 2013) per the Survey Plan, which states acceptable accuracy is +/- 0.5 foot vertically and 3 feet horizontally for 95 percent of all data points. Real-time kinematic (RTK) checks described in this report indicated that better accuracies were achieved. Table 2-1 presents a summary of the survey equipment.

#### 2.2 HORIZONTAL AND VERTICAL CONTROL CHECKS

All data was referenced to North American Datum of 1983 (NOAA, 2011), Oregon North in international ft. The vertical datum will be referenced to North American Vertical Datum of 1988<sup>2</sup> using Geoid 12B in ft.

The horizontal and vertical positions of three existing benchmarks (V14, UPSTREAM 2 1978, WALL 1961) were verified using the Washington State Reference Network station PDXA. Each benchmark was staked out then verified through a series of three, 180-epoch RTK observations. Daily RTK checks were performed at the National Oceanic and Atmospheric Administration Tidal

<sup>&</sup>lt;sup>1</sup> Units have been converted from metric system to imperial system throughout the document for consistency.

 $<sup>^{20}</sup>$  ft Colombia River Datum (CRD) = 5.28 ft North American Vertical Datum of 1988. CRD is used as the nautical chart datum for the Lower Willamette River. CRD is a reference plane that U.S. Army Corps of Engineers established in 1912 by observing low water elevations at various points along the Columbia and Willamette rivers (USACE, 1966). Consequently, CRD is not a fixed/level datum but slopes upward as one moves upstream. River users can obtain the depth on a chart and apply tide or river-level gauge readings, relative to CRD, to compute actual water depth. Low water values are used for navigation charting to provide conservative depth values in the event accurate tide data is not available to the river user.

Station 9439221 Portland, Morrison Street Bridge, Oregon, before and after data acquisition using corrections from station PDXA. Tolerances did not exceed 0.07 ft vertically. Figure 2-2 presents the benchmark locations relative to the survey area and the benchmark elevations compared to RTK observations.

#### 2.3 CALIBRATION, VALIDATION, AND DATA PROCESSING

The vessel was positioned with an integrated Position and Orientation System for Marine Vessels Wavemaster with inertial measurement unit (IMU) to account for the vessel's angular movement. Prior to MBES collection, a patch-test calibration was completed to quantify and adjust for misalignment angles between the multibeam sonar and the IMU. During the survey, specific planned lines were run to account for roll, pitch, and yaw misalignment values.

Vertical offsets were measured while on the trailer, prior to initiating survey activities, to ensure measurements to and from positioning equipment were accurate with a precision of less than 1.2 inches<sup>3</sup>. RTK observations were performed and compared real-time to the collection software on the vessel to verify offsets within 0.1ft to the IMU, sonar and waterline on the vessel. The waterline measurement verification showed less than 0.1ft difference between the vessel measurement and RTK measurement. The bar check occurred within SIB at the Marine Consortium, Inc. pier. The bar check verification also showed less than 0.1ft difference between the sonar and bar check measurements. Sound velocity was measured at the multibeam sonar head and sound velocity profiles of the water column were taken throughout the survey area as additional validation. Vessel load did not change substantially during survey operations. Draft was verified once at the beginning of the survey. The EM 1110-2-1003 Hydrographic Surveying (USACE, 2013) states that when precise RTK water surface elevation is determined in real time, there is no requirement to track tide changes and dynamic draft variations separately.

Latency was checked once at the beginning of the survey during the patch test and found to be zero. Per the EM 1110-2-1003 Hydrographic Surveying (USACE, 2013), latency biases are zero when Coordinated Universal Time time-tagged Global Positioning Systems are used. Additionally, latency is generally negligible when surveys are conducted with very accurate Global Navigation Satellite System time synchronization and pulse-per-second triggering.

Approximately 175 percent coverage with multibeam data was achieved. A statistical test completed with the SIB Project Area data illustrates that 100 percent of the multibeam survey data comprises International Hydrographic Organization Special Order category. Position data was post-processed in Applanix Position and Orientation Post Processing Package<sup>™</sup> inertial processing software using Washington State Reference Network station PDXA. This allowed the creation of a more accurate and robust Smoothed Best Estimate of Trajectory (SBET) solution which was applied to the data for positioning corrections and horizontal and vertical control throughout the duration of the survey. Prior to applying corrections, the SBET was analyzed for quality. The full motion and position solution of the SBET was applied to the multibeam data to maximize overall accuracy.

<sup>&</sup>lt;sup>3</sup> Units have been converted from metric system to imperial system throughout the document for consistency.

Establishment of survey control was not required due to availability of existing nearby benchmarks, and control was verified in place. Prior to collection, a GNSS Azimuth Measurement System (GAMS) calibration of the POSMV was performed. Post-processing was aided by real-time standard deviation plots for overlapping survey data that were created and monitored throughout the survey. Collecting multibeam data with an active standard deviation layer ensures all erroneous data and objects of interests stand out due to a high standard deviation value. Quality control was achieved through RTK check shots to verify vessel offsets, GAMS calibrations to assure accurate positioning, and a bar check to assure accurate depths before beginning the survey.

All MBES bathymetry data was processed in the Qimera software. Multibeam data was analyzed in both a 3-D point cloud, which visualizes the full dataset, as well in 2-D which is down-sampled as a gridded dataset. Data was gridded at the highest resolution that the data coverage allowed. The horizontal resolution resulted in a grid cell size of 1ft by 1ft. Analysis that eTrac performed prior to the survey indicated that slopes were relatively flat in the multibeam survey area and that 1x1-foot gridded data would meet the data quality objectives laid out in the Survey Plan.

## 3.0 SURVEY RESULTS SUMMARY

This section provides a summary overview of the findings of the bathymetric survey and identification of features on the riverbed surface. The multibeam bathymetry survey dataset, following the Federal Geographic Data Committee Content Standard for Digital Geospatial Metadata, is provided as an electronic data deliverable (EDD, Attachment B). The EDD includes the following digital files:

- 1. Vessel positioning data files, including raw and processed vessel location data for use in POSPAC and base data for use in the Trimble Business Center;
- 2. Digital elevation model, in \*.dem format for use in ArcGIS, ArcPro, Autodesk Civil3D, or Global Mapper;
- 3. Raw survey data files, including raw multibeam database files for use in Qimera;
- 4. Daily Field Reports;
- 5. Geo-referenced Tiff (GeoTIFF) files; and
- 6. Google Earth kmz format merged DEM data."

#### 3.1 MULTIBEAM BATHYMETRY

The main channel of the Willamette River has depths up to 57 ft located downstream of the dry dock basin, and approximately 53 ft within the dry dock berth. At the mouth of SIB near the northeast end of Pier A, moving into the SIB towards the southeast end of the SIB, depths decrease from approximately 30 ft to less than 10 ft. Figure 3-1 presents an overview of the bathymetry in the survey area. Figures 3-2 to 3-11 present close-ups of the observed elevations in different zones within the survey area corresponding to zones as labeled in Figure 3-1.

#### **3.2 SURFACE FEATURES**

The bathymetry survey identified marks on the surface of the riverbed within the dataset. The marks are illustrated on Figure 3-12.

#### 3.3 DATA GAPS IN BATHYMETRY SURVEY DATASET

Data gaps still exist in areas where large vessels and structures obstructed the bathymetric survey and along the shoreline due to the river stage at the time of the survey (Figure 3-1). There were vessels present in zones C, G, H, and I. The river stage precluded obtaining shoreline data from all zones but zone B. A unified elevation model is in progress that incorporates other data types/sources including: City of Portland 2019 light detection and ranging (LiDAR), SIB 2022 mobile LiDAR, 2018 Bathymetric Survey for the Vigor Shipyard Facility (eTrac, Inc.), and Willamette River, Oregon – River Mile 1.9 to 11.8 Hydrographic Survey (2018 Portland Harbor Bathymetry Data – David Evans and Associates, Inc.). A comparative evaluation of historic (2018) bathymetry data and 2022 bathymetry data will be completed during subsequent stages of the PDI Evaluation Report and Basis of Design Report development to determine whether the 2018 bathymetry datasets can be utilized to address data gaps. If there are gaps in the bathymetric data needed to support the remedial design that cannot be addressed with existing LiDAR and bathymetry data sources, an additional bathymetric survey may be considered to fill these data gaps. As noted in the introduction, the bathymetry survey was intended to provide additional information for analysis purposes during the PDI. Coverage was maximized at SIB by observing vessel movements to attempt to survey while vessels were not at berth, revisiting areas when feasible based on the vessel movements and tides, targeting shallower areas at highest possible water levels during the survey period, and maneuvering the vessel into the tightest possible areas while maintaining safe operations. Shallower areas could not be surveyed due to river stage at the time of the survey, which was conducted in tandem with the utility and debris survey efforts at SIB. Based on gage data from the U.S. Geologic Survey (USGS) station 14211720, the river stage during the survey ranged from 6.83 to 10.71 feet North American Vertical Datum of 1988 (USGS, 2023). Reasonable bottom elevation approximations will be made in areas where data collection was not feasible (e.g., under permanently moored vessels or large pile-restrained floats), using interpolation based on observed slopes, or filling with previously collected bathymetric data if analysis shows recent changes are minimal.

Additional survey work, including bathymetry data collection in selected locations, will be conducted based on specific design needs during the RD.

### 4.0 **REFERENCES**

- U.S. Environmental Protection Agency (EPA), 2017. Record of Decision, Portland Harbor Superfund Site, Portland, Oregon.
- EPA, 2021. Administrative Settlement Agreement and Order on Consent for Remedial Design, Swan Island Basin Project Area, CERCLA Docket No. 10-2021-001 - 7, Region 10. January 20.
- HydroGeoLogic, Inc. (HGL), 2022a. Pre-Design Investigation Work Plan, Revision 2, CERCLA Docket No. 10-2021-001. Prepared for the Swan Island Remedial Design Group, Overland Park, Kansas. March.
- HGL, 2022b. *Field Sampling Plan, Revision 2, CERCLA Docket No. 10-2021-001.* Prepared for the Swan Island Remedial Design Group, Overland Park, Kansas. March.
- HGL, 2022c. Uniform Federal Policy-Quality Assurance Project Plan, Revision 2, CERCLA Docket No. 10-2021-001. Prepared for the Swan Island Remedial Design Group, Overland Park, Kansas. March.
- Mott MacDonald, 2022. Survey and Quality Control Plan, Revision 4. March 21.
- National Oceanic and Atmospheric Administration (NOAA), 2011. The National Adjustment of 2011 Project: Alignment of Passive GNSS Control with the Three Frames of the North American Datum of 1983 at Epoch 2010.00: NAD83 (2011), NAD83 (PA11), and NAD83 (MA11). At URL https://www.ngs.noaa.gov/web/surveys/NA2011/.
- U.S. Army Corps of Engineers (USACE), 1966. Aerial photograph COE 324 taken February 22, 1966.
- USACE, 2013. 013 *EM 1110-2-1003 Hydrographic Surveying*. November 30. At URL https://www.publications.usace.army.mil/Portals/76/Publications/EngineerManuals/EM\_1110-2-1003.pdf?ver=gDGVUj\_0XR2sXHiIpQZv2Q%3d%3d
- U.S. Geological Survey (USGS), 2023. *Willamette River at Portland, OR 14211720*. April. At URL https://waterdata.usgs.gov/monitoring-location/14211720/


TABLES


 Table 2-1


 Multibeam Bathymetry Survey Equipment and Calibration Check Information


Equipment	Description				
R2 Sonic 2024 MBES	Utilizes 256 discrete beams with a maximum swath width of 160° run at 450 kHz with a maximum 100° swath width and 700 kHz with a maximum swath width of 60°.				
	The MBES and vessel were positioned with a fully integrated position and motion system receiving corrections from WSRN station PDXA and were processed using an SBET.				
AML BaseX2 Sound Velocity Probe	Capability down to 1,640 ft and a sound velocity range of 4,511 to 6,234 ft/s.				
Universal Sonar Mount	Sound velocity was measured and monitored at the multibeam sonar head and sound velocity profiles of the water column were taken throughout the survey area.				
R2Sonic I2NS Marine Inertial Positioning System	Tightly coupled GNSS and inertial MRU to account for the movement of the vessel along each axis.				
Applanix POSPac <sup>™</sup>	Inertial processing software using WSRN station PDXA, allowing creation of a robust SBET solution, which was applied to the data for positioning corrections and horizontal and vertical control throughout the duration of the survey.				
QINSy positioning software	Utilized to acquire multibeam and vessel positioning data				
Notes:					
IMUinertial measurkHzkilohertzMBESMultibeam EchMRUmotion referenPDXAWSRN stationPOSMVPosition and OPOSPac™Applanix PositQINSyQuality IntegraRTKreal-time kinen	tion Satellite System ement system noSounder ce unit named "PDXA" located at Portland International Airport rientation System for Marine Vessels cion and Orientation Post Processing Package ated Navigation System				

**FIGURES** 

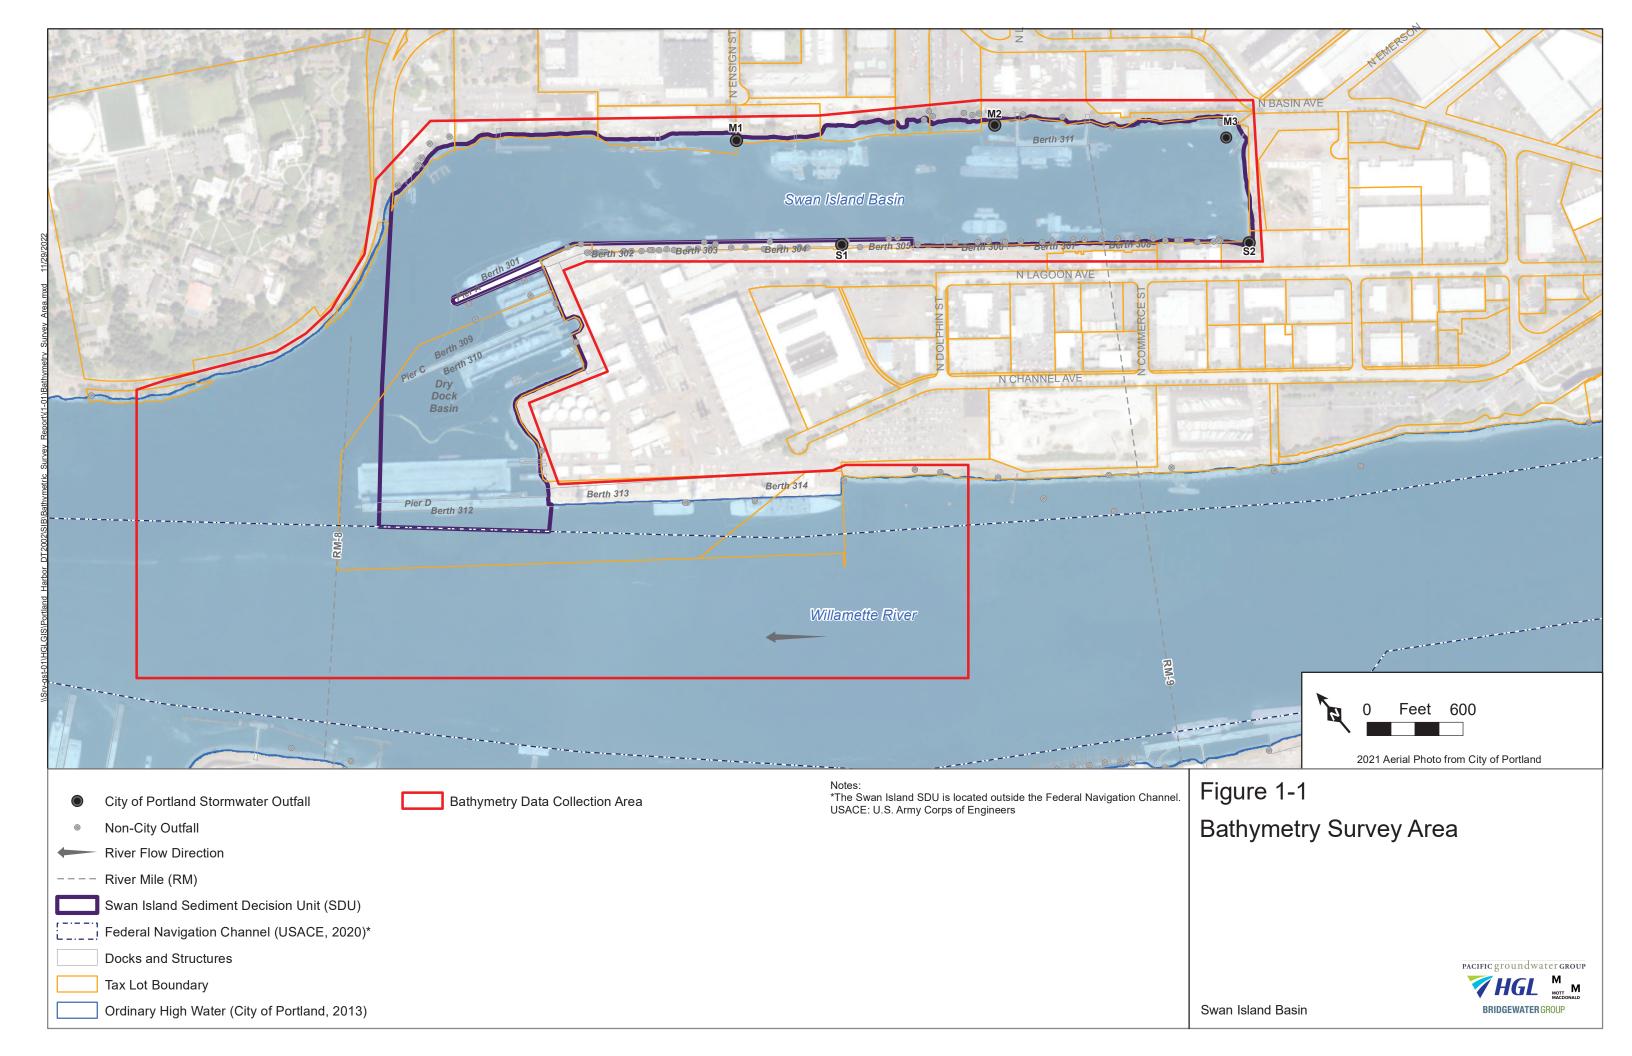

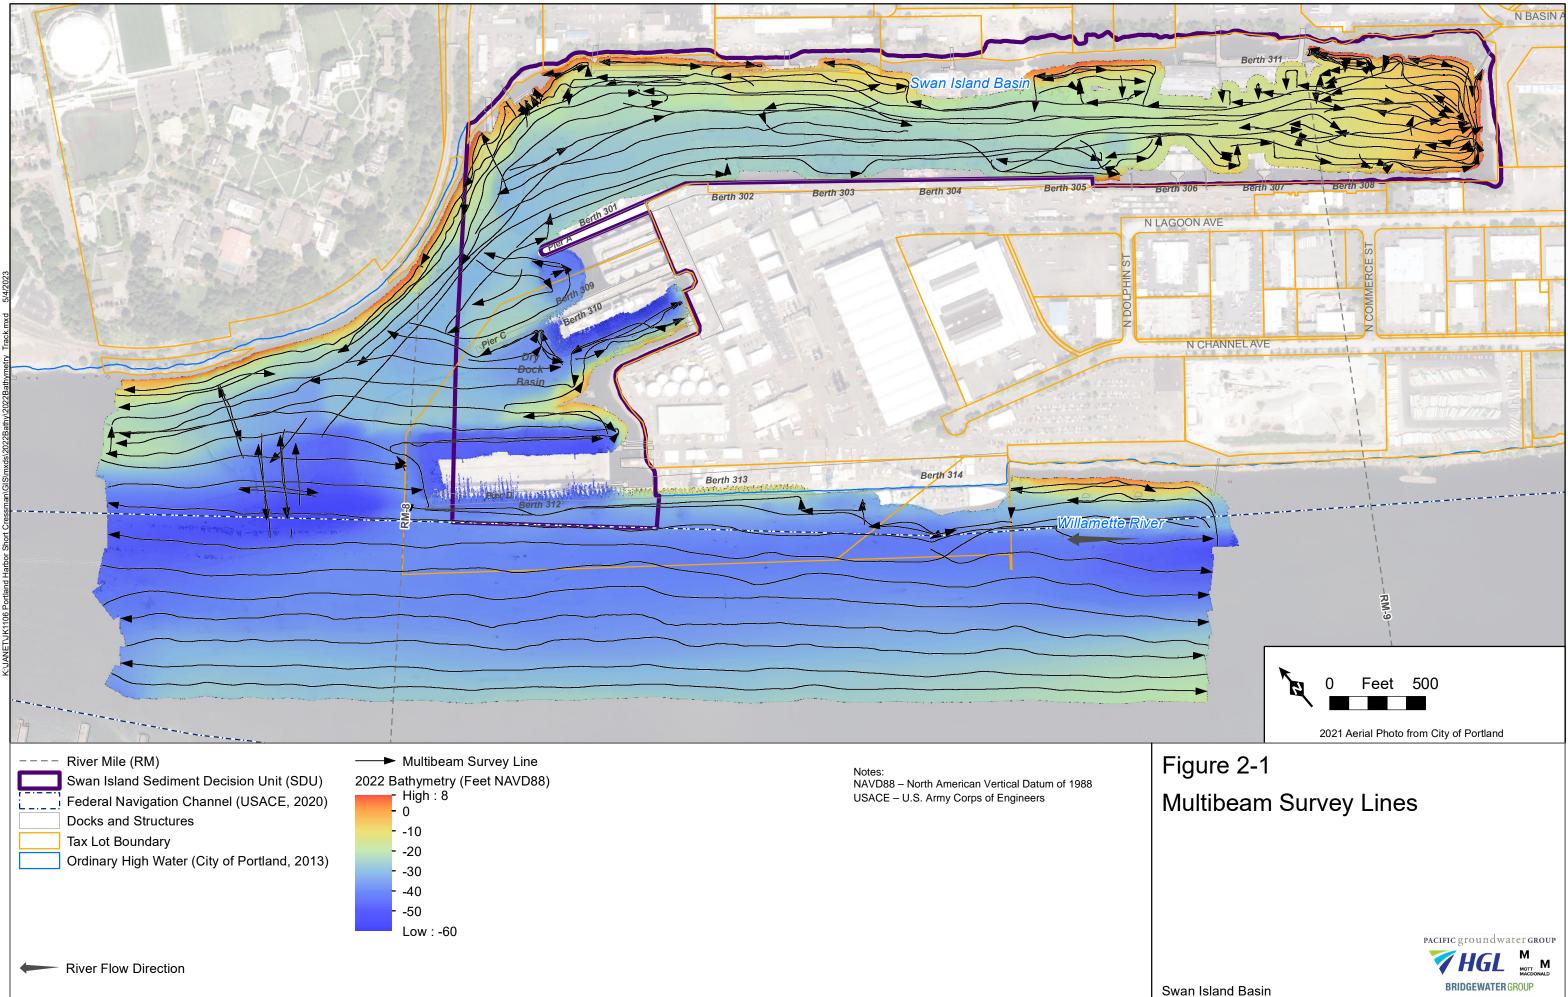

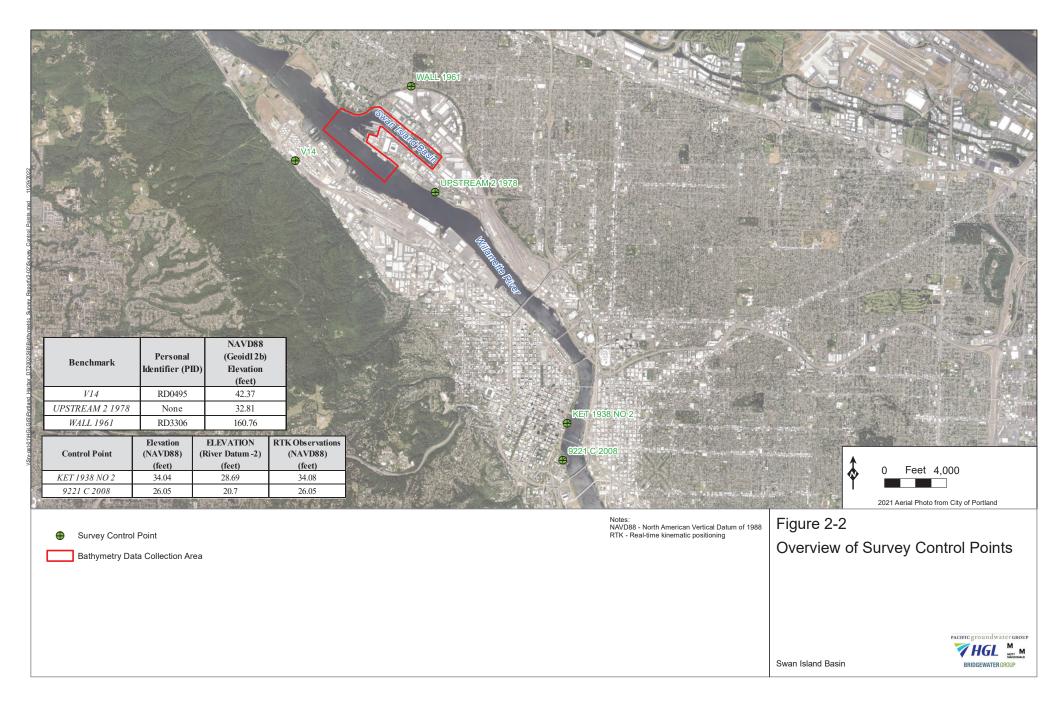


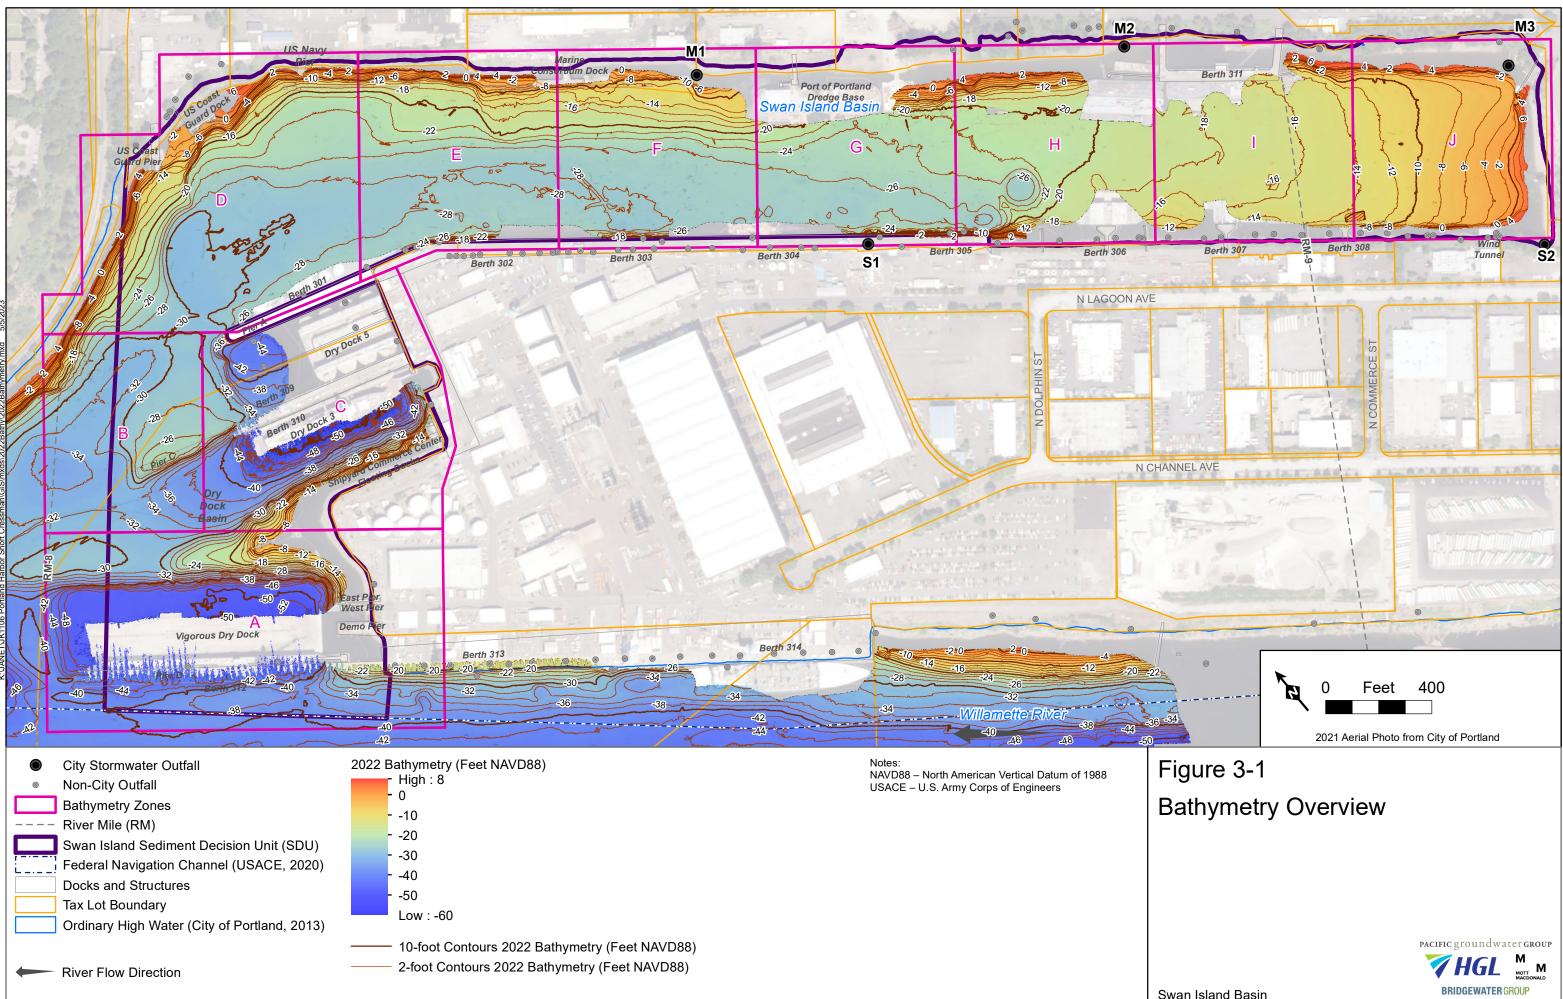



Swan Island Basin


-32-or	-32 -33 		B	Basin 31	-37 50 50 50	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	C
2921003	-29 -31 -36	-32		-24		-1 -1 -1 -11 -25 -31 -38 -42	-16 -19 -36 -33 -36
22Bath/V2022Bath/metry Detail2.mxd	43 -44 -8-MB				-50, -50, -50, A	-48 -49 -50 -51 -51 -52 -52	14 <u>6</u>
nd Harbor Short Cressman/GIS/mxds/20	40			Vigorous Dry	Dock r		
K-UANETUK1106 Portla			Pier D 44 43 44 A3 A3 A3	100 100 100 100 100 100 100 100 100 100	Bern 314 1 43	46 42 43 AA 4 A 4	
- Ho			the coo		- 38 	the second secon	
	Non-City Outfall River Mile (RM) Swan Island Sediment D Federal Navigation Chan	ecision Unit (SDU)	Docks and Structures Tax Lot Boundary Ordinary High Water (City of Bathymetry Zones 5-foot Contours 2022 Bathyr 1-foot Contours 2022 Bathyr	Portland, 2013) metry (Feet NAVD88)	22 Bathymetry (Feet NAV	NAVD88 – North Ame USACE – U.S. Army	erican Vertical Datum of Corps of Engineers 0




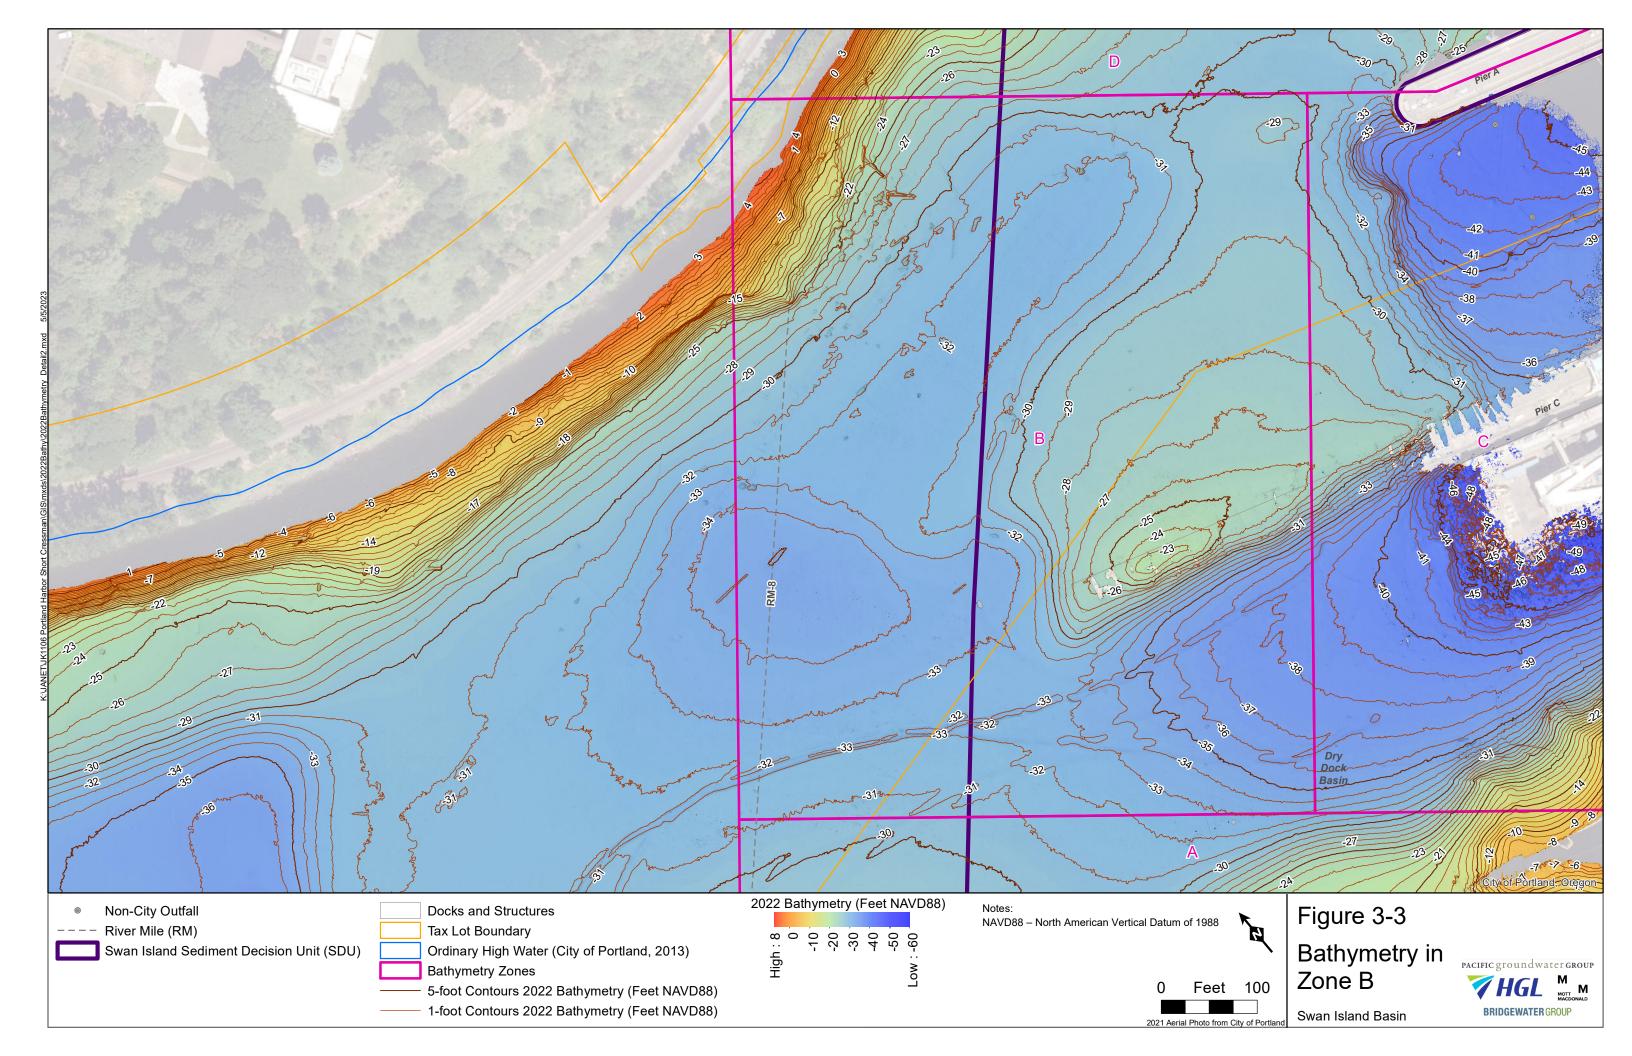


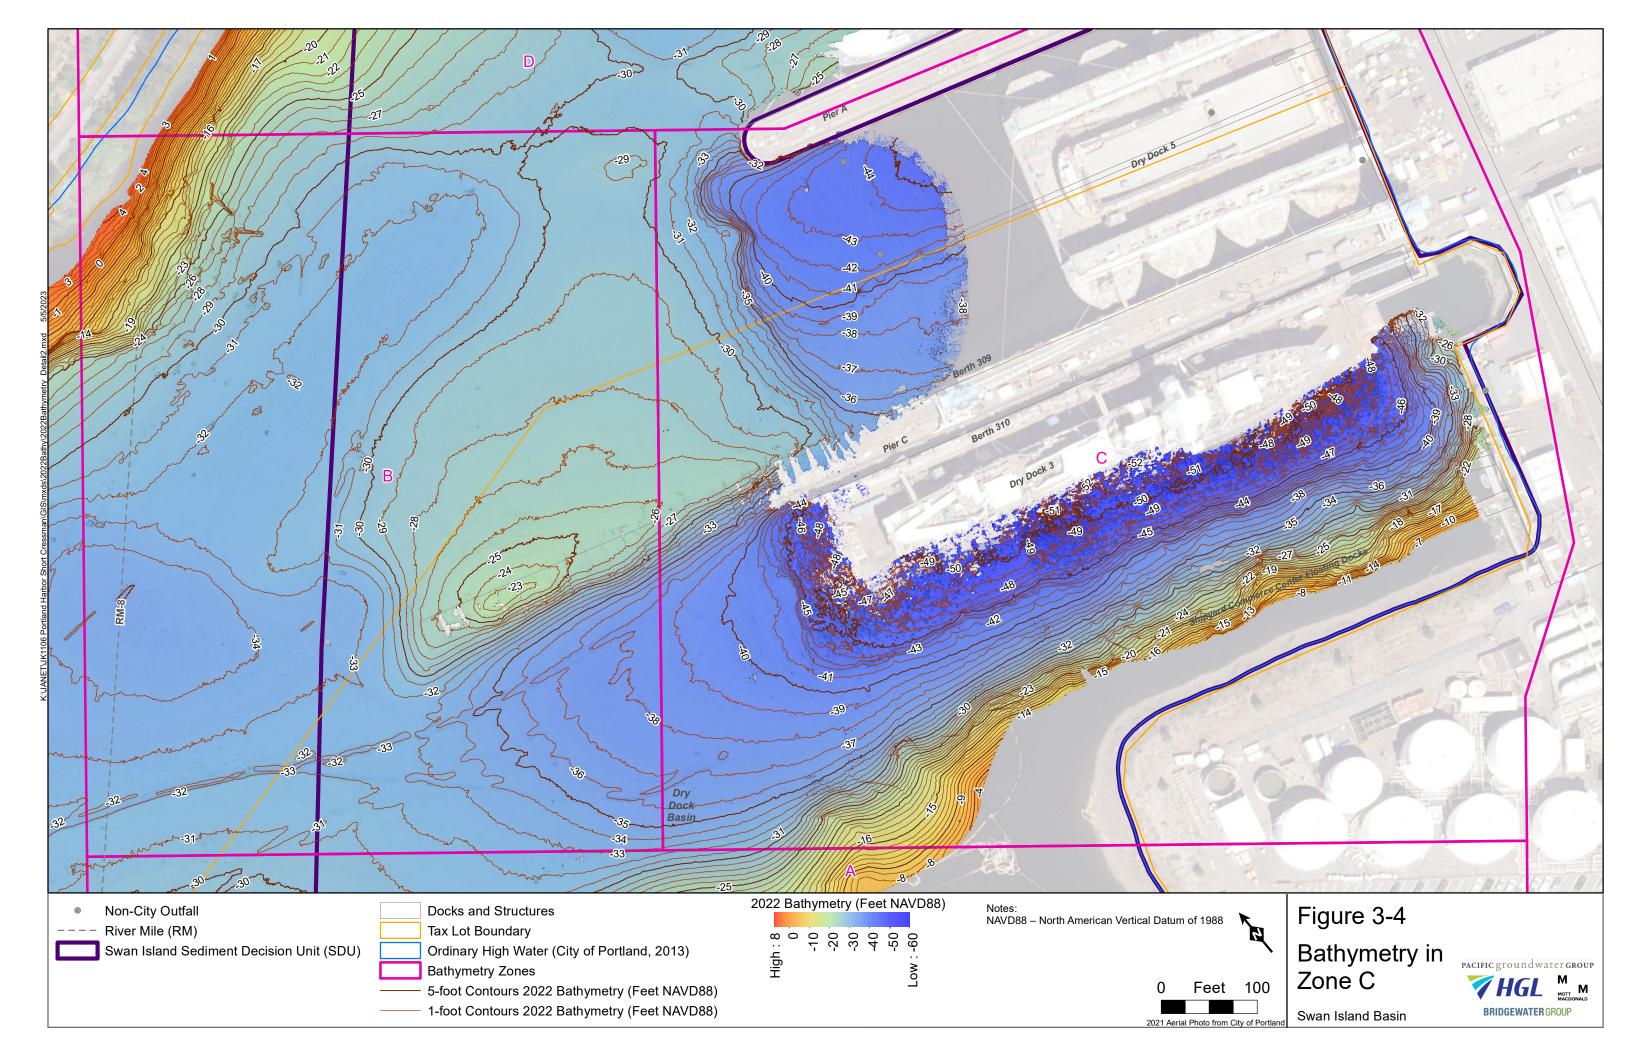


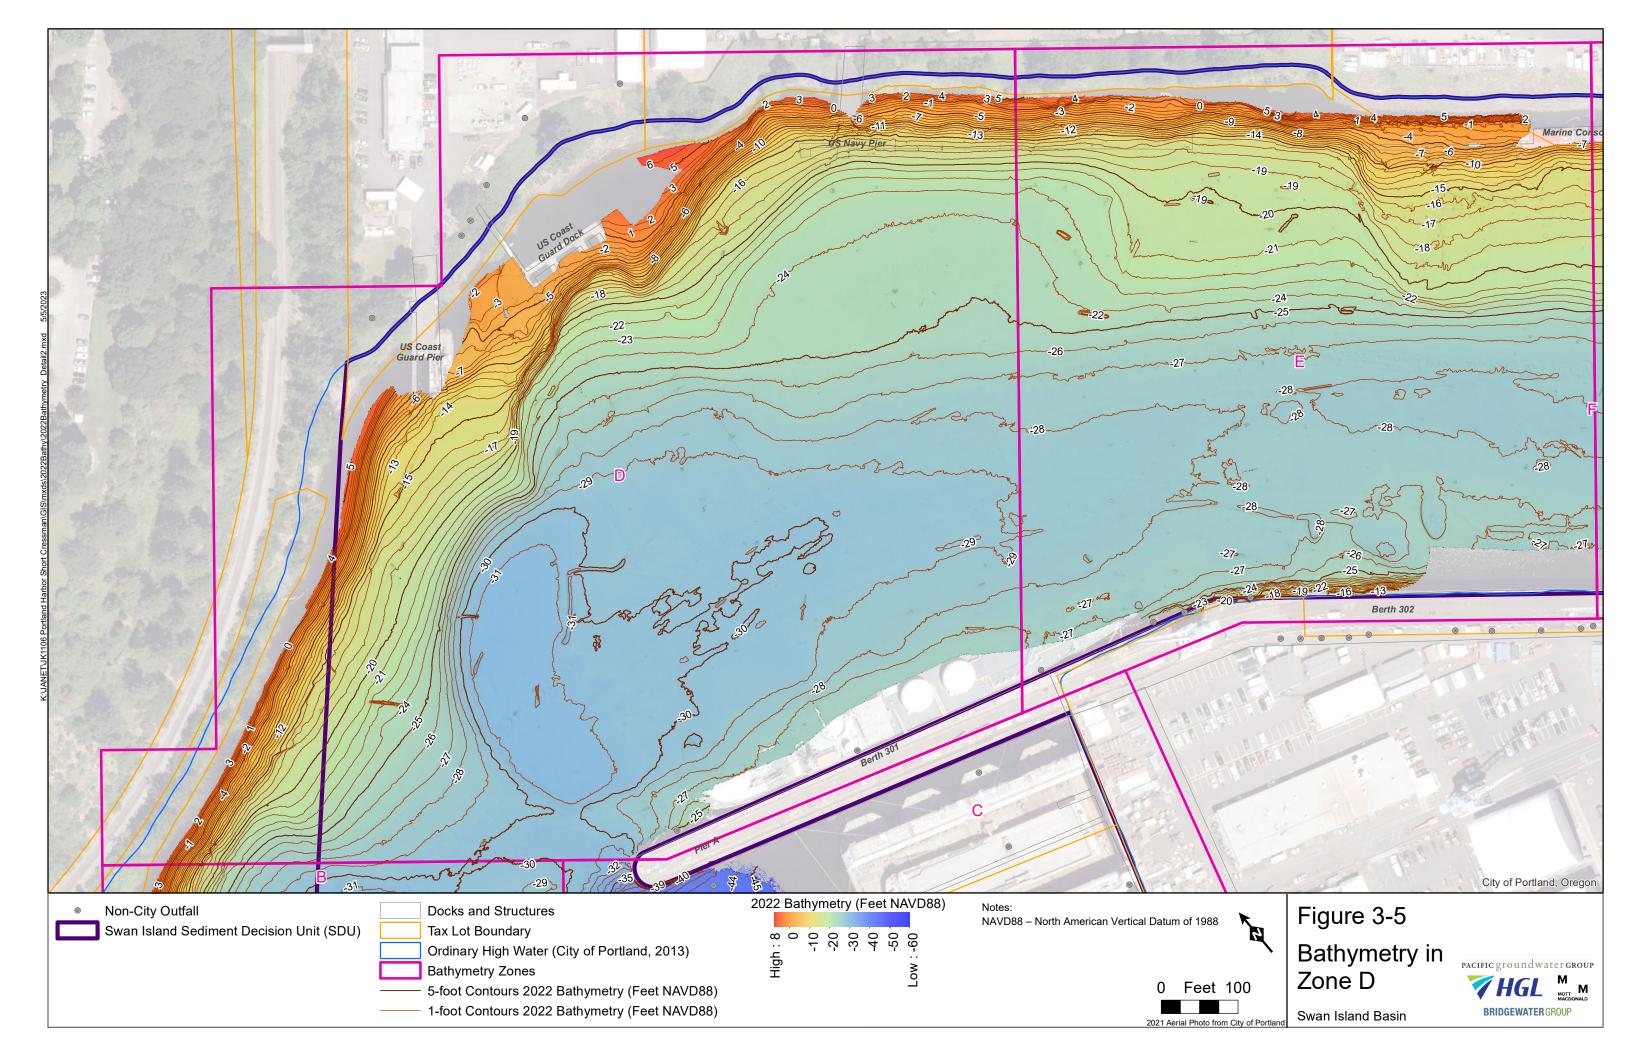


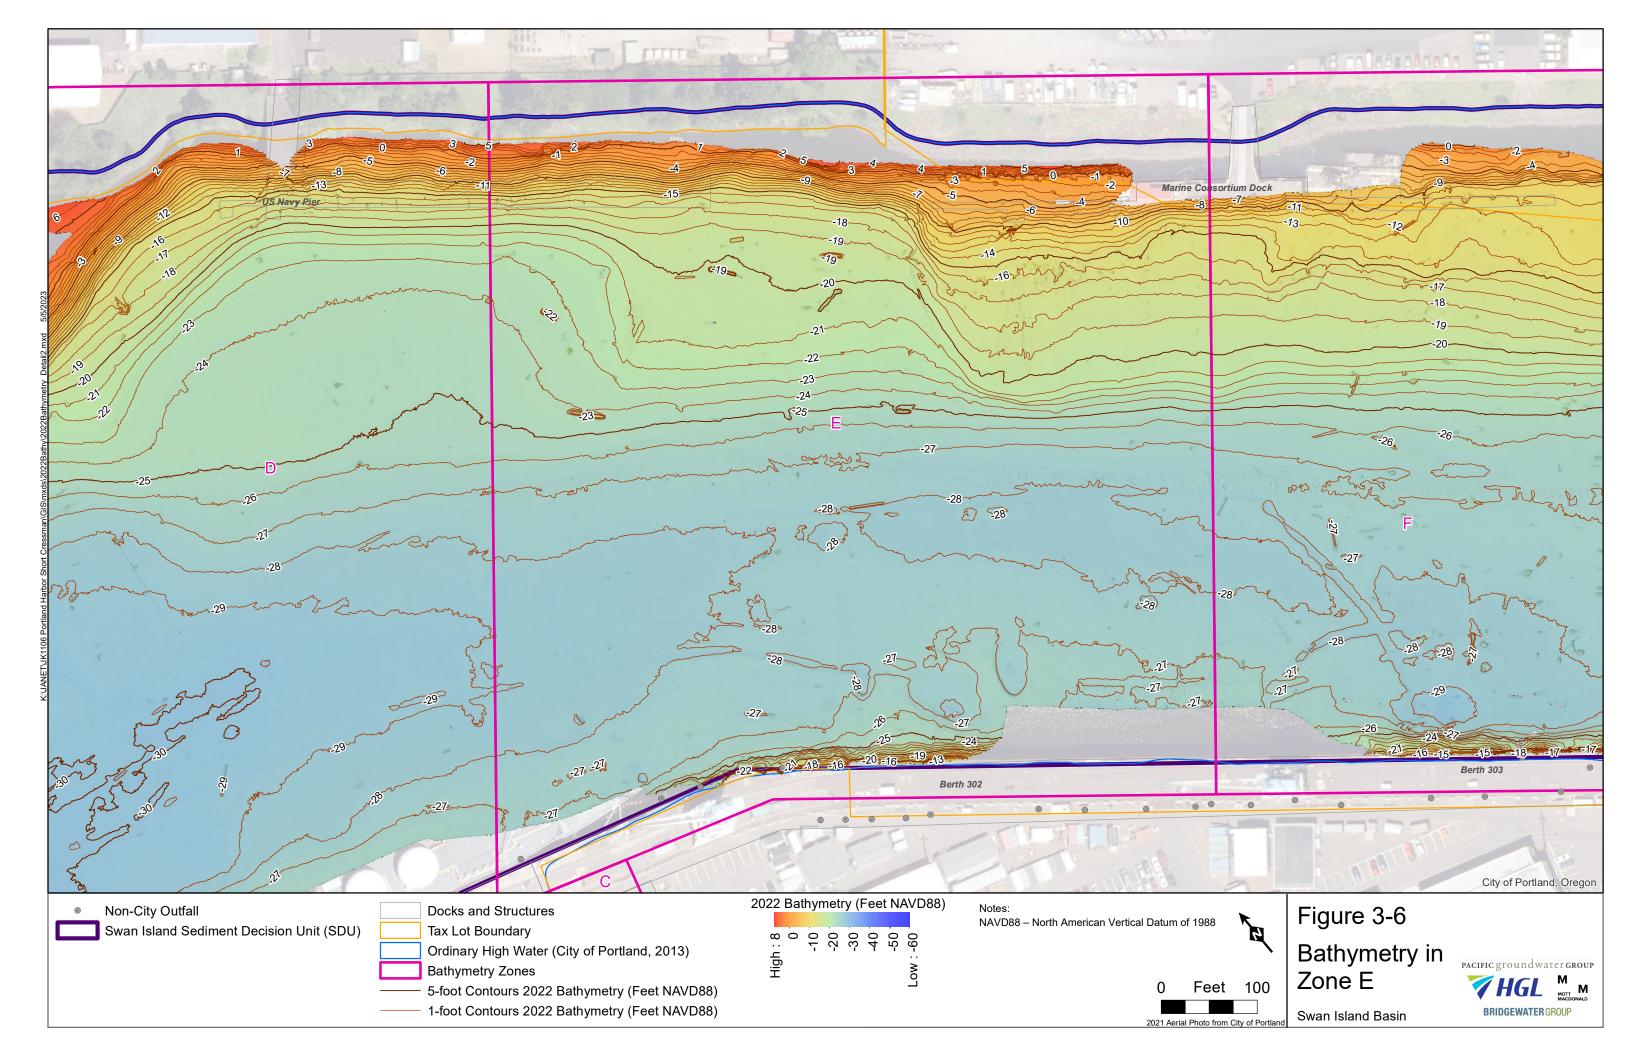


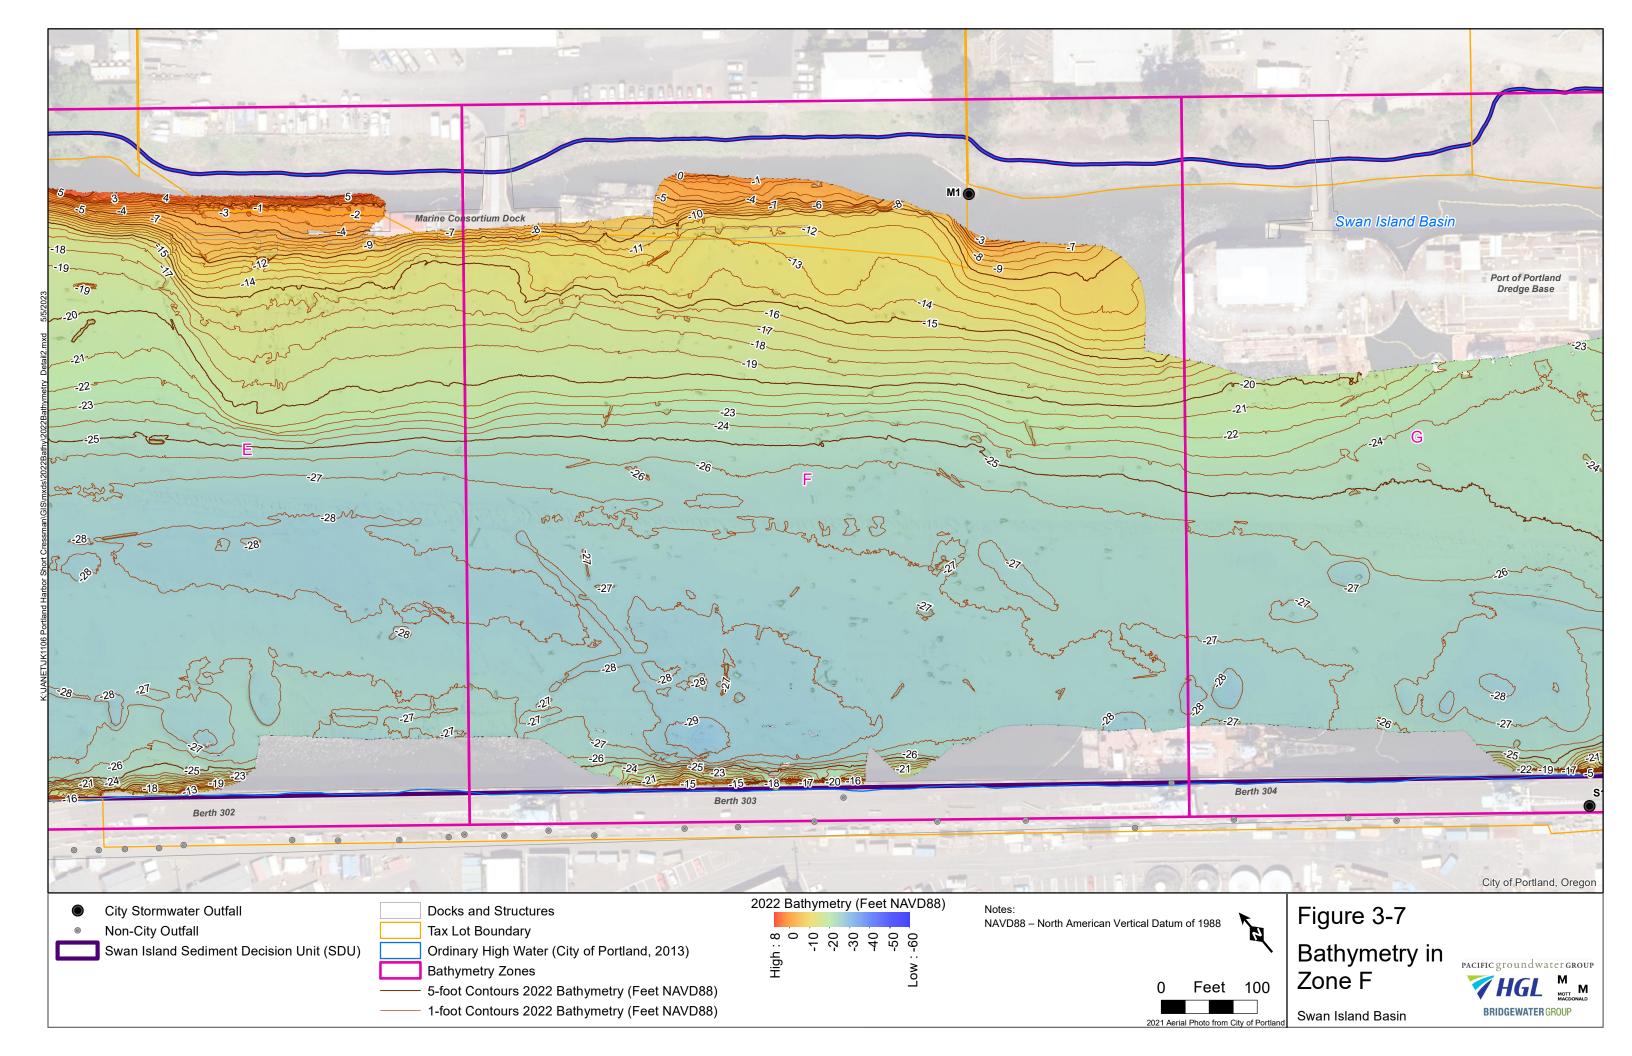


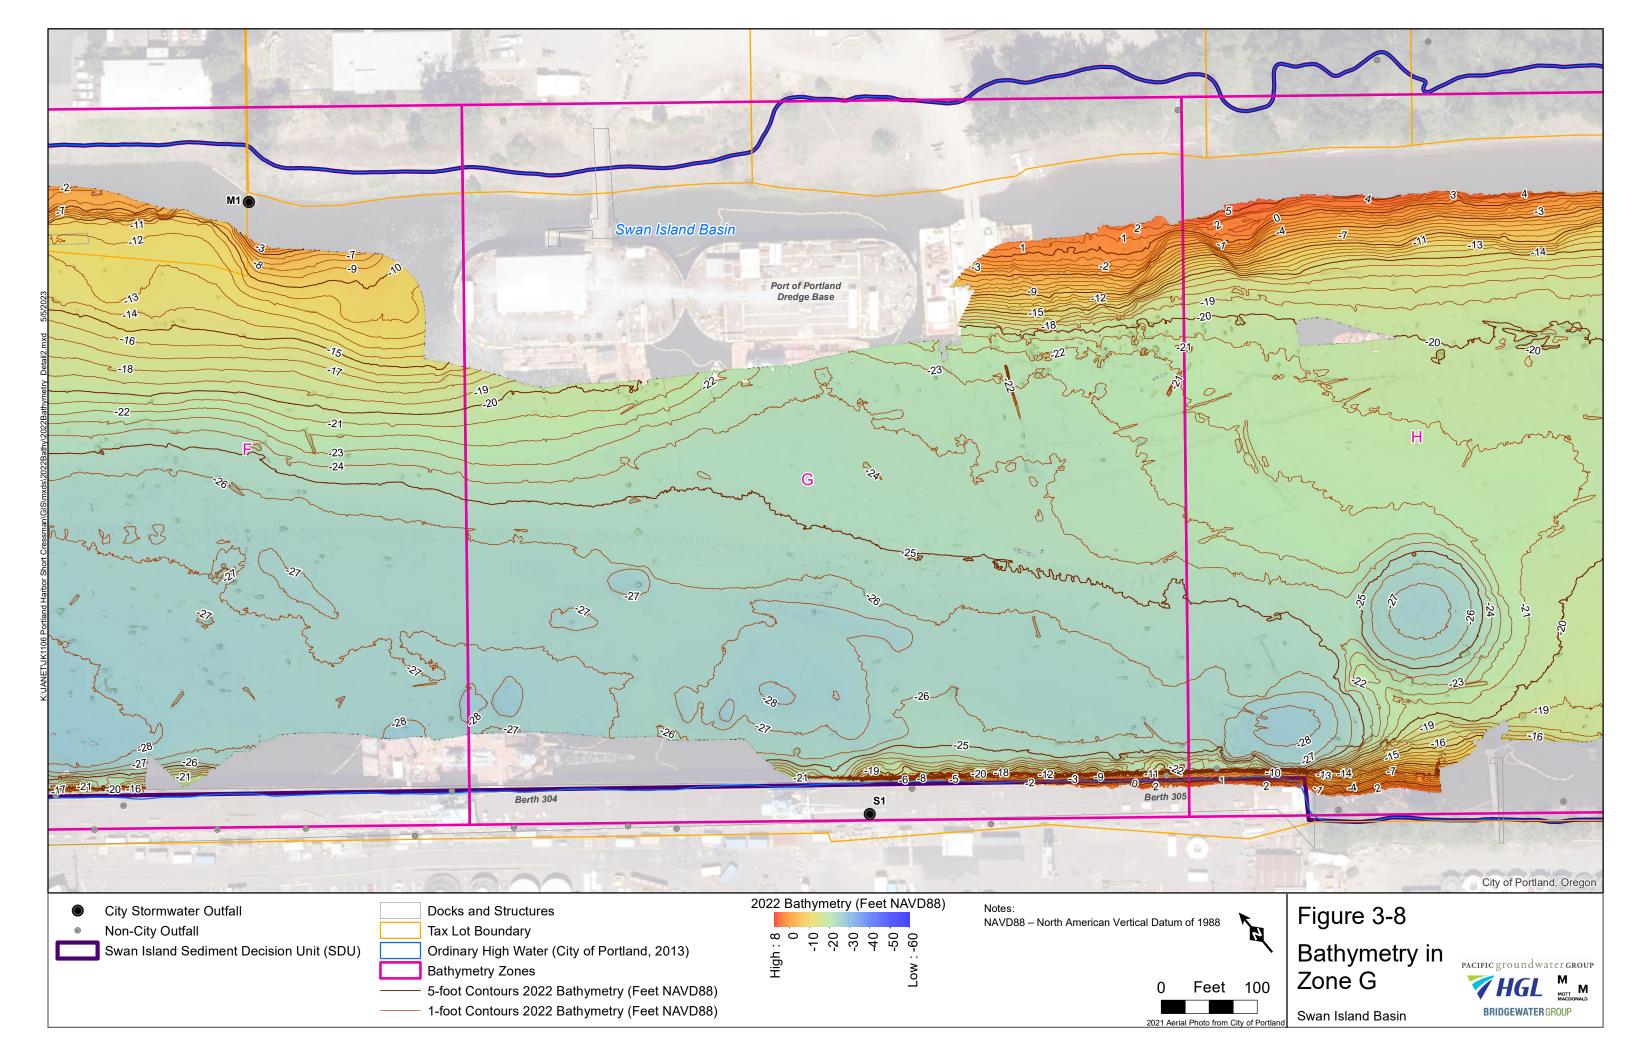

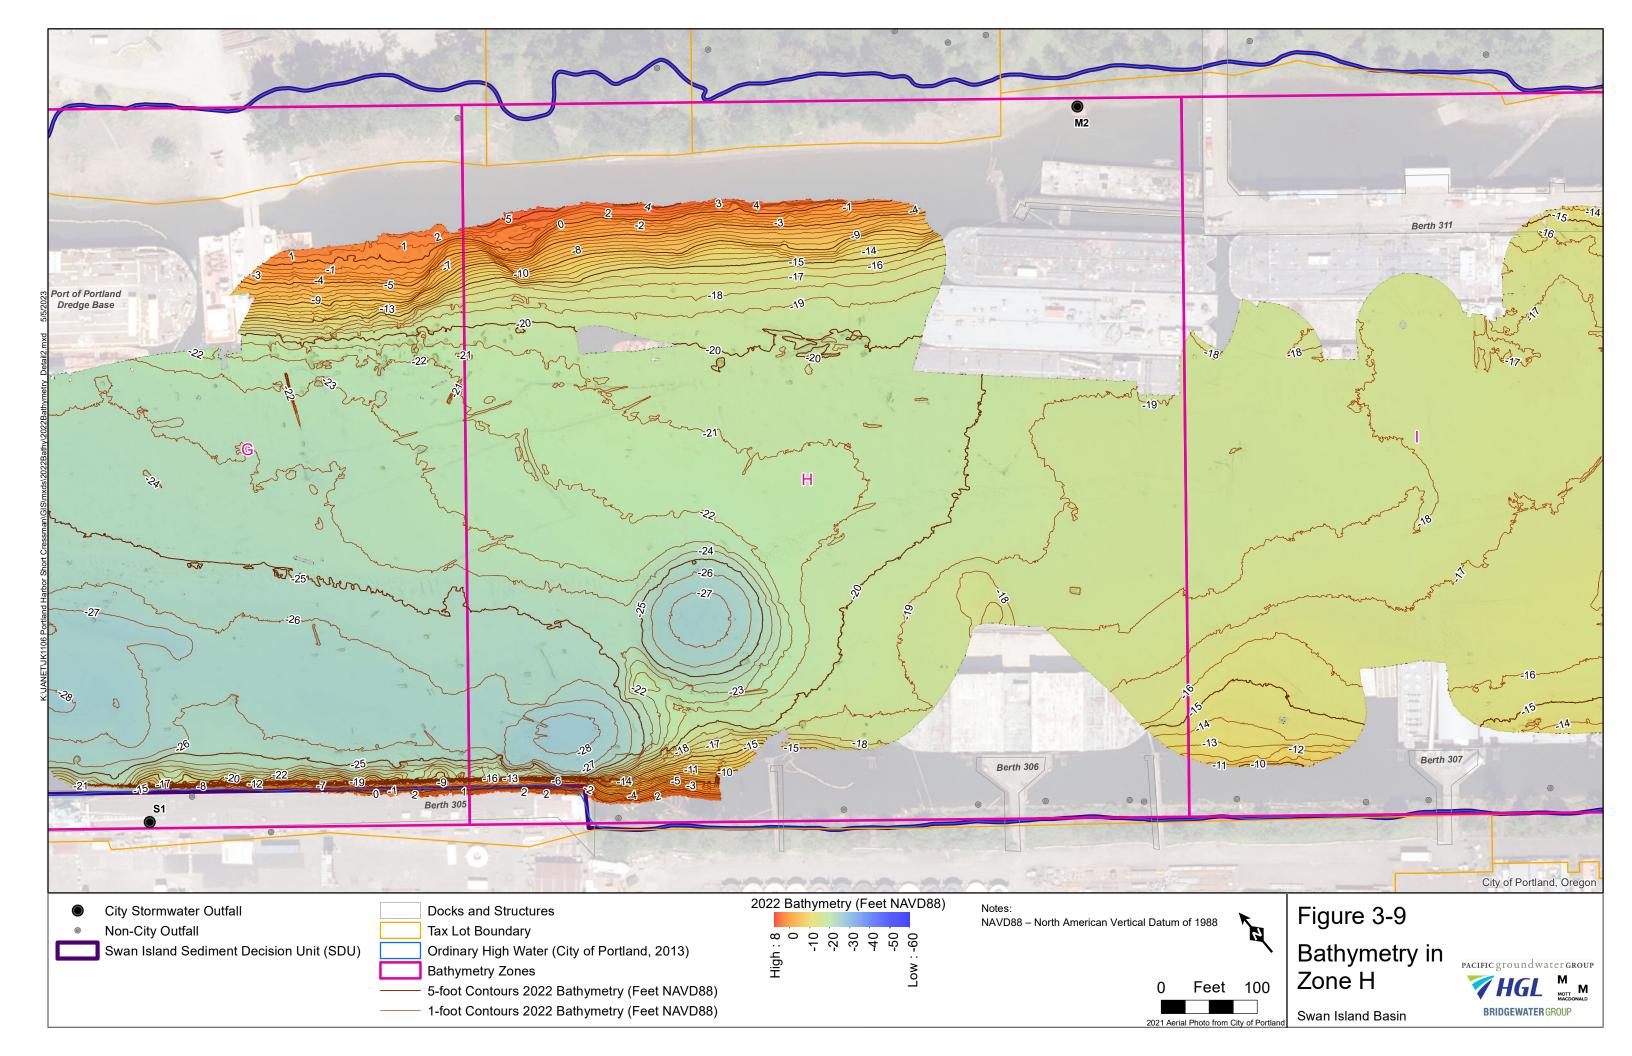

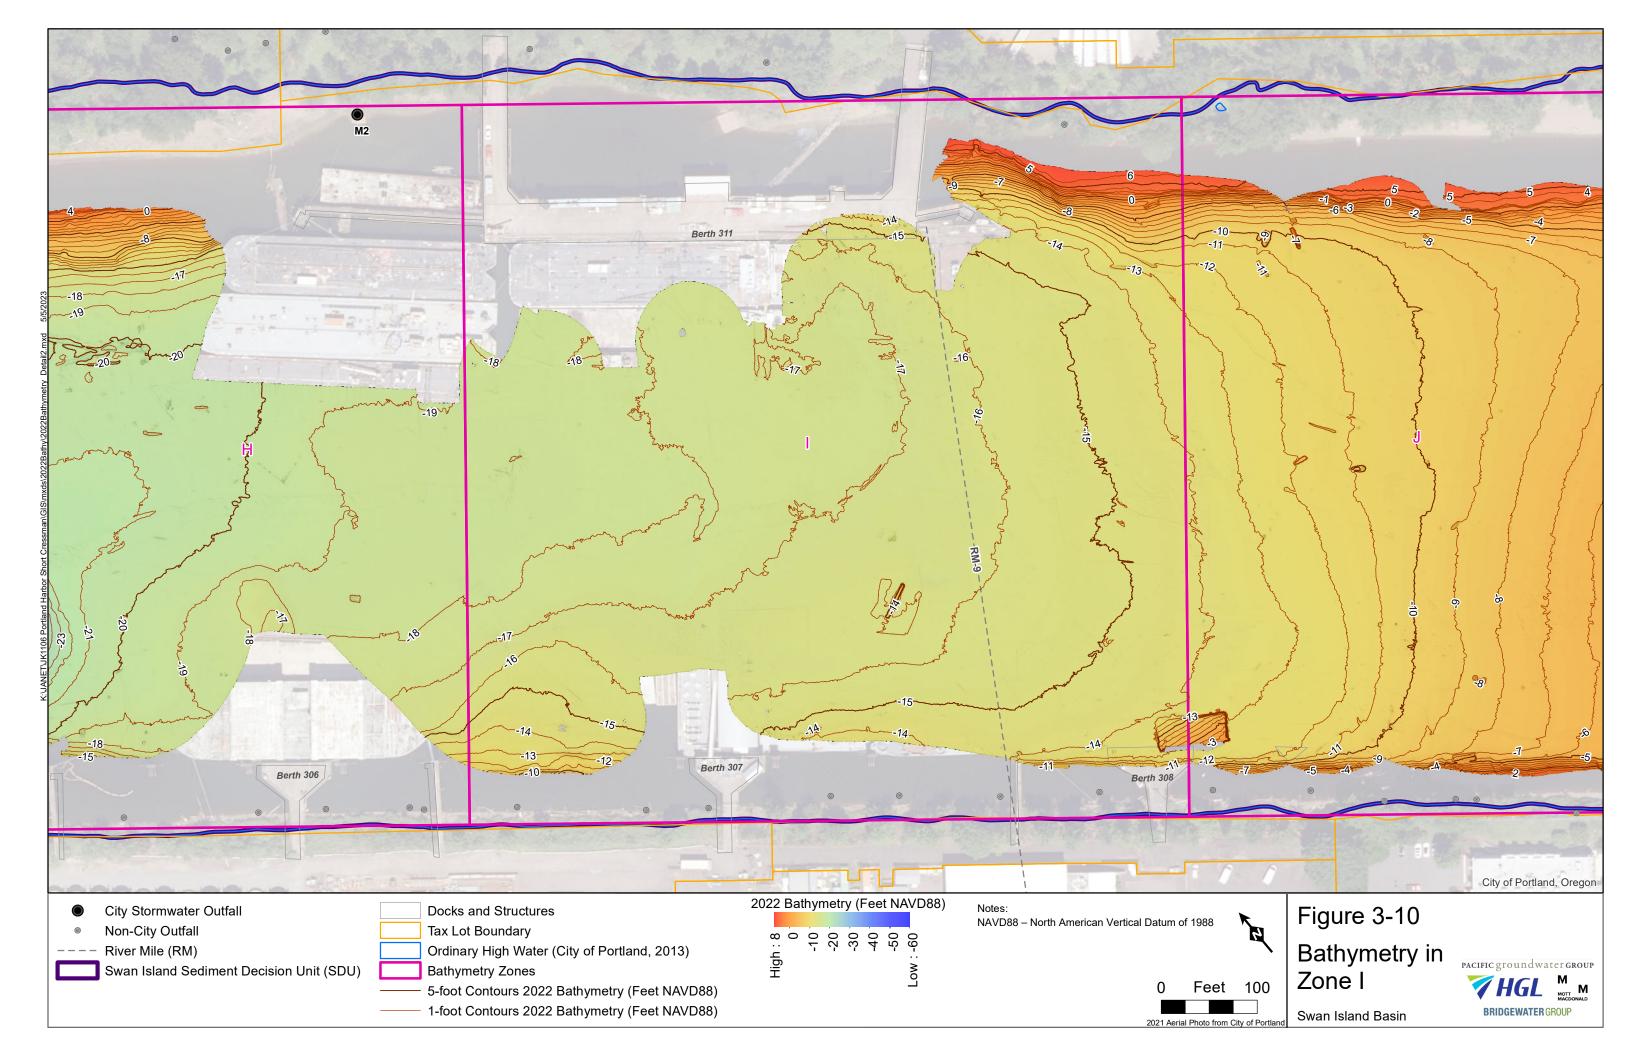

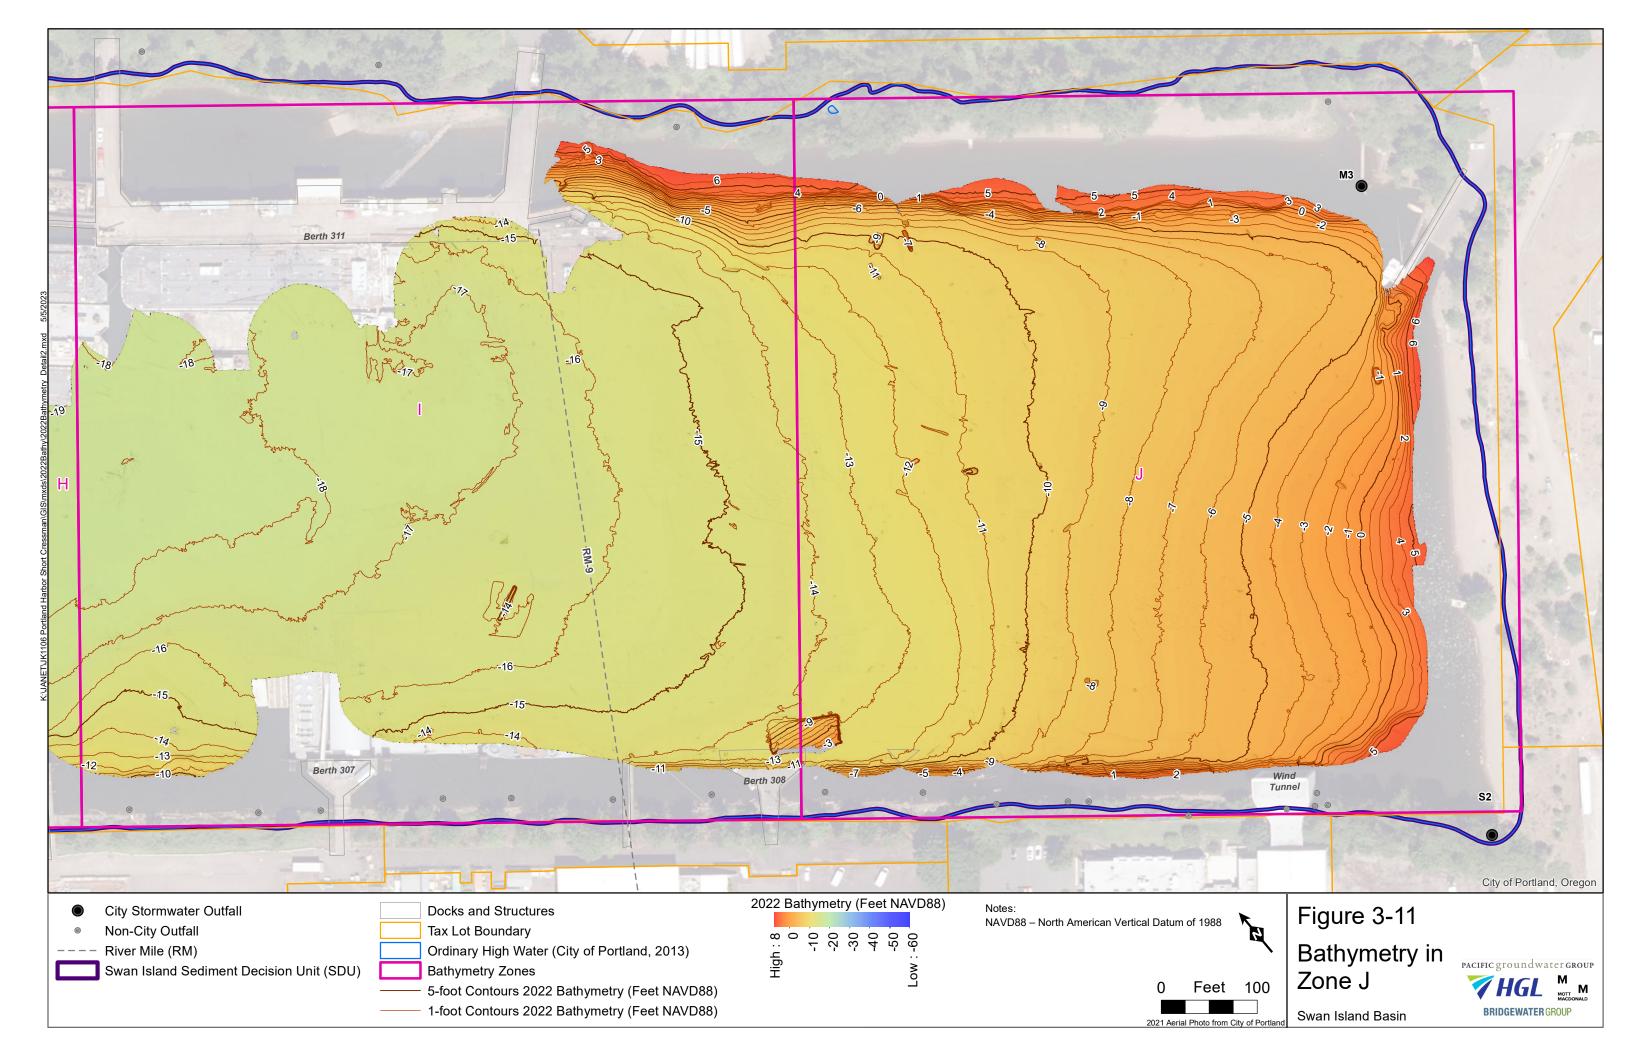

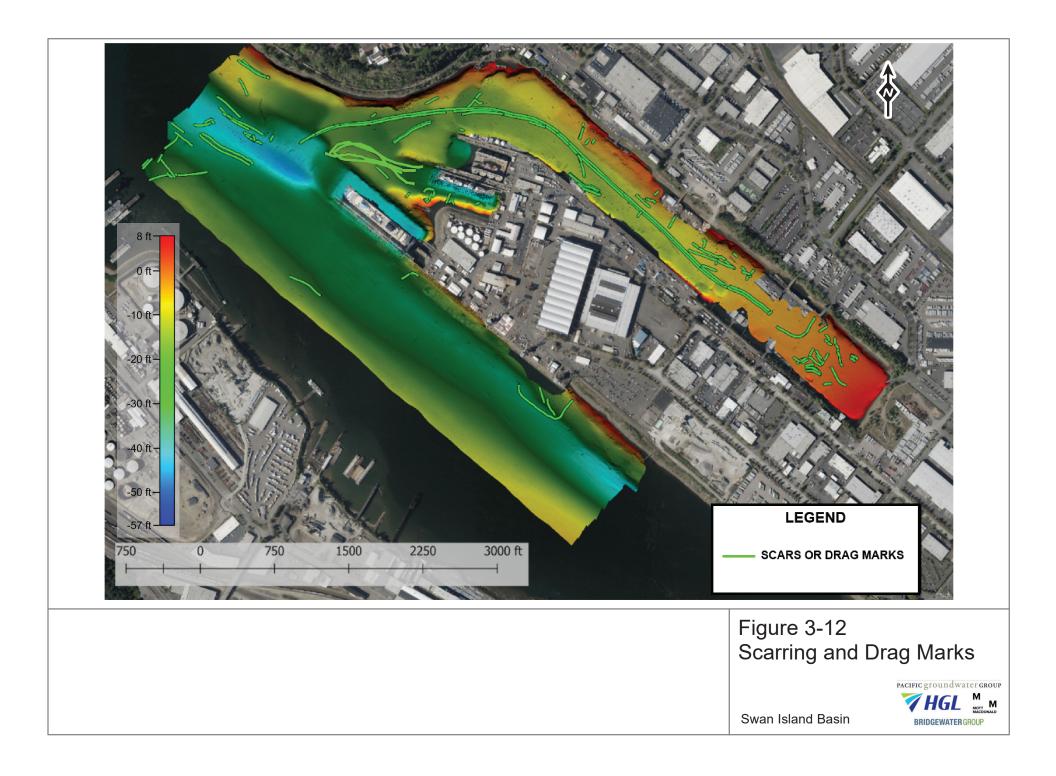

# ATTACHMENTS

This page was intentionally left blank.

# ATTACHMENT A

# **DAILY FIELD REPORTS**

This page was intentionally left blank.



DATE:

04-04-2022

PLANNED ACTIVITY PERIOD:

04-09-2022

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Weather:		Heavy Rain					
Temperature:		55					
Wind:		25kts					
Humidity:		90%					

**PROJECT**: Portland Harbor Superfund Site - Swan Island Basin Project Area CONTRACT NUMBER: DT2002

## HGL Staff: None

Teaming Partners/Subcontractors: eTrac: Adam Taylor (Project Manager), Cody Gibson (Hydrographer), Samantha Czwalina (Hydrographer)

Regulatory Oversight: None

Equipment On Site: Survey Vessel Spectrum, R2 Sonic 2024 Multibeam, AML BaseX2 Sound Velocity Probe, Edgetech 4200 Side-Scan, Riegl VZ400 LiDAR Scanner, Geometrics 882 Magnetometer

Work Performed by PDI Activity:

Bathymetric and Geophysical Survey

1) Collection of Bathymetric Data via Multibeam

Quality Control Activities (including field calibrations): Patch-Test Calibration (Note: the calibration data will be available once the data is processed following the field activities.)

Health and Safety Activities: Daily safety briefing – Man-Overboard Toolbox Talk

Problems Encountered/Corrective Action Taken: None

Special Notes: None

## Other Possible Documentation:

- No deviations from the PDI-WP (if yes, describe in *Problems Encountered/Corrective Action Taken*)
- ☑ No samples collected (if yes, list above and provide sample sheets or spreadsheet of sample details)
- □ No calibrations performed (if yes, list above and see the associated note)
- No unusual events (if yes, describe above in *Special Notes*)
- □ No photographs taken (if yes, place jpgs on SP with the details (see Documentation Guidance) in a spreadsheet)
- No Field Measurements collected (if yes, provide them in Work Performed by PDI Activity above or provide a spreadsheet if measurements are numerous)

Planned Activities for the Next Day:

Continuation of Bathymetric Data Collection

Title: Field Coordinator



eTrac Inc. 617 S Knik-Goose Bay Rd, Ste C Wasilla, AK 99654

p: (415) 462-0421 f: (415) 480-2032 www.etracinc.com

# Survey Field Notes: SWAN ISLAND

ID	Time	Description			
	4/4/22 6:43	CODY, SAM AND ADAM ON SV SPECTRUM			
	4/4/22 6:43	DEPART FRED'S MARINA, TRANSIT TO SWAN ISLAND			
POSPAC START	4/4/22 6:46	BEGIN POSPAC LOGGING			
SVP CAST	4/4/22 7:19	SVP TAKEN AND APPLIED LINE 1, 1452			
	4/4/22 7:20	BEGIN PATCH TEST LINE 1			
	4/4/22 7:41	PING RATE CHANGED TO 30			
	4/4/22 7:49	PATCH TEST LINES 1-6			
	4/4/22 7:49	BEGIN COLLECTION LINE 7			
SVP CAST	4/4/22 10:15	SVP TAKEN AND APPLIED LINE 0054			
SVP CAST	4/4/22 13:55	SVP CAST TAKEN AND APPLIE LINE 57 (1452.4)			
	4/4/22 17:36	FINISHED SURVEY LINE 0128			
POSPAC STOP	4/4/22 17:44	END POSPAC LOGGING			
	4/4/22 17:45	BEGIN TRANSIT TO FRED'S MARINA			

Photo Number (assigned by camera, or 1, 2etc. but it then	runch by	Description	Direction	Date	Time	GPS Coo	ordinates
needs to be in the filename)	filename) (Initials)				Lat	Long	
20220404_113533	CG	Site Conditions - Ships in the Survey Area	W	4/4/2022	1135	45 deg 33' 52.80" N	45 deg 33' 52.80" N
20220404_113546	CG	Swan Island Basin Overview	S	4/4/2022	1135	45 deg 33' 52.80" N	122 deg 42' 44.34" W
20220404_113627	CG	Barges and Ships within Survey Limits	NE	4/4/2022	1136	45 deg 33' 54.37" N	122 deg 42' 44.34" W

## SIB Surveys (Magnetometer, multi-beam, LiDAR) Photo Log









HydroGeoLogic, Inc	<ul> <li>Site Safety (</li> <li>Supervisor's</li> <li>Supervisor's</li> <li>UXO Aware</li> <li>Asbestos Av</li> </ul>	ard Analysis azard Analysis (prior to new task or operation) Drientation (new personnel) (monthly) (weekly) ness
Date/Time: <u>4-4-2022</u>		Client: DTNA / Vigor
Location: Swan Island Basin - Portl	and Harbor Superfund Site	Job No.: DT2002
Meeting/training conducted by:	eTrac Inc	
Work Activities: Hydrographic Sur		
	Safety / Tra	ining Topics Presented
Chemical Hazards:	-	
Physical Hazards: Slips and Falls		
Specific Training Covered: How	to safely rescue personnel th	nat may fall into the water during survey operations.
Specific framing covered.		
		Attendees
Name Printed and Employee	Number:	Signature:
CODY GIBSON		
ADAM TAYLOR		
SAMANTHA CZWALINA		



DATE:

04-05-2022

## PLANNED ACTIVITY PERIOD:

04-09-2022

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Weather:			Partly Cloudy				
Temperature:			50°				
Wind:			5kts				
Humidity:			20%				

**PROJECT**: Portland Harbor Superfund Site - Swan Island Basin Project Area CONTRACT NUMBER: DT2002

### HGL Staff: None

Teaming Partners/Subcontractors: eTrac: Adam Taylor (Project Manager), Cody Gibson (Hydrographer), Samantha Czwalina (Hydrographer)

#### Regulatory Oversight: None

Equipment On Site: Survey Vessel Spectrum, R2 Sonic 2024 Multibeam, AML BaseX2 Sound Velocity Probe, Edgetech 4200 Side-Scan, Riegl VZ400 LiDAR Scanner, Geometrics 882 Magnetometer

## Work Performed by PDI Activity:

Bathymetric and Geophysical Survey

- 1) Collection of Bathymetric Data via Multibeam
- 2) Collection of Side-Scan Imagery

### Quality Control Activities (including field calibrations): None

Health and Safety Activities: Daily safety briefing – Launch and Retrieval of Side-Scan Equipment

## Problems Encountered/Corrective Action Taken: None

### Special Notes: None

### Other Possible Documentation:

- No deviations from the PDI-WP (if yes, describe in *Problems Encountered/Corrective Action Taken*)
- $\times$ No samples collected (if yes, list above and provide sample sheets or spreadsheet of sample details)
- No calibrations performed (if yes, list above and provide calibration forms)  $\mathbf{X}$
- No unusual events (if yes, describe above in Special Notes)  $\times$
- □ No photographs taken (if yes, place jpgs on SP with the details (see Documentation Guidance) in a spreadsheet)
- No Field Measurements collected (if yes, provide them in Work Performed by PDI Activity above or  $\boxtimes$ provide a spreadsheet if measurements are numerous)

### **Planned Activities for the Next Day:**

MW

Continuation of Side-Scan Collection

Signature:

Title: Field Coordinator

eTrac

eTrac Inc. 617 S Knik-Goose Bay Rd, Ste C Wasilla, AK 99654

p: (415) 462-0421 f: (415) 480-2032 www.etracinc.com

# Survey Field Notes:

ID	Time	Description
	4/5/22 6:51	SAM, ADAM, AND CODY ON SV SPECTRUM, TRANSIT FROM FRED'S MARINA TO SURVEY SITE
POSPAC START	4/5/22 6:55	STARTED POS LOGGING
	4/5/22 7:05	SV TAKEN AND APPLIED
	4/5/22 7:08	PATCH STARTING LINE 0129
	4/5/22 11:49	END MBES LINES FOR THE DAY, LINE 227
POSPAC END	4/5/22 11:57	END POSPAC LOGGING FOR MBES
POSPAC START	4/5/22 12:43	START POSPAC LOGGING _B
	4/5/22 12:43	BEGIN SSS LINES
	4/5/22 12:50	BEGIN TEST LINE
	4/5/22 12:56	START LINE 23
	4/5/22 16:44	END SSS COLLECTON FOR THE DAY
POSPAC STOP	4/5/22 16:44	END POSPAC LOGGING _B
	4/5/22 16:45	RETRIEVE GEAR
	4/5/22 16:53	BEGIN TRANSIT BACK TO FRED'S MARINA

Photo Number (assigned by camera, or 1, 2etc. but it then	такен бу	Description	Direction	Date	Time	GPS Coordinates		
needs to be in the filename)	(initials)					Lat	Long	
20220404_113533	CG	Ships in the Survey Area	W	4/4/2022	1135	45 deg 33' 52.80" N	45 deg 33' 52.80" N	
20220404_113546	CG	Swan Island Basin Overview	S	4/4/2022	1135	45 deg 33' 52.80" N	122 deg 42' 44.34" W	
20220404_113627	CG	Barges and Ships within Survey Limits	NE	4/4/2022	1136	45 deg 33' 54.37" N	122 deg 42' 47.38" W	
20220405_080627	CG	Barges in Survey Area	NE	4/5/2022	0806	45 deg 33' 11.43" N	122 deg 43' 49.24" W	
20220405_080652	CG	Barges in Survey Area	N	4/5/2022	0807	45 deg 33' 11.43" N	122 deg 43' 49.24" W	
20220405_092049	CG	Piles and Deadhead in Northern Survey Area Shoreline	NW	4/5/2022	0921	45 deg 34' 14.23" N	122 deg 43' 21.13" W	

## SIB Surveys (Magnetometer, multi-beam, LiDAR) Photo Log









HydroGeoLogic, Inc Exceeding Expectations	<ul> <li>Pre-Tasi</li> <li>Site Safe</li> <li>Supervision</li> <li>Supervision</li> <li>UXO Awe</li> <li>Asbesto</li> </ul>	Hazard Analysis k Hazard Analys ety Orientation (r sor's (monthly) sor's (weekly) vareness os Awareness and Safety Plan A	is (prior to new task or operation) new personnel) Addendum:
Date/Time:			Client: DTNA / Vigor
Location: Swan Island Basin - Portla	1d Harbor Superfund S	Site	Job No.: DT2002
Meeting/training conducted by:	Trac Inc		
Work Activities: Hydrographic Surve	ying		
	Safety /	Training Topic	s Presented
Chemical Hazards:			
Physical Hazards: Slips and Falls			
Specific Safety Topic(s): Man-Ove			
Specific Training Covered: <u>How t</u>	o safely rescue person	nnel that may fall into t	he water during survey operations.
· · · · · ·			
		Attendees	
Name Printed and Employee	Number:	Si	gnature:
CODY GIBSON			
ADAM TAYLOR			
SAMANTHA CZWALINA			



DATE: \_\_\_\_ PLANNED ACTIVITY PERIOD:

04-06-2022 04-09-2022

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Weather:				Clear			
Temperature:				60°			
Wind:				5-10kts			
Humidity:				20%			

**PROJECT**: Portland Harbor Superfund Site - Swan Island Basin Project Area **CONTRACT NUMBER:**DT2002

### HGL Staff: None

**Teaming Partners/Subcontractors:** eTrac: Adam Taylor (Project Manager), Cody Gibson (Hydrographer), Samantha Czwalina (Hydrographer)

Regulatory Oversight: None

**Equipment On Site:** Survey Vessel Spectrum,R2 Sonic 2024 Multibeam, AML BaseX2 Sound Velocity Probe, Edgetech 4200 Side-Scan, Riegl VZ400 LiDAR Scanner, Geometrics 882 Magnetometer, Innomar Sub-Bottom

## Work Performed by PDI Activity:

Bathymetric and Geophysical Survey

- 1) Collection of Side-Scan Imagery
- 2) Begin Magnetometer Surveys
- 3) Mobilization of Sub-bottom Profiler

Quality Control Activities (including field calibrations): N/A

**Health and Safety Activities:** Daily safety briefing – Launch and Retrieval of Side-Scan Equipment and Mobilization/Launch Retrieval of Magnetometer

### Problems Encountered/Corrective Action Taken: None

**Special Notes:** Various Ships going in and out of Swan Island Basin. eTrac paused survey operations numerous times to give way to ships.

## Other Possible Documentation:

- No deviations from the PDI-WP (if yes, describe in *Problems Encountered/Corrective Action Taken*)
- No samples collected (if yes, list above and provide sample sheets or spreadsheet of sample details)
- No calibrations performed (if yes, list above and provide calibration forms)
- □ No unusual events (if yes, describe above in *Special Notes*)
- □ No photographs taken (if yes, place jpgs on SP with the details (see Documentation Guidance) in a spreadsheet)
- No Field Measurements collected (if yes, provide them in *Work Performed by PDI Activity* above or provide a spreadsheet if measurements are numerous)

## Planned Activities for the Next Day:

• Magnetometer and Sub-bottom Surveys

hatal

Title: Field Coordinator

Signature:

eTrac

eTrac Inc. 617 S Knik-Goose Bay Rd, Ste C Wasilla, AK 99654


p: (415) 462-0421 f: (415) 480-2032 www.etracinc.com

# Survey Field Notes:

ID	Time	Description
	4/6/22 6:48	CODY, ADAM, AND SAM DEPARTED FREDS MARINA
POSPAC START	4/6/22 6:58	STARTED POS LOGGING
	4/6/22 7:22	SIDE SCAN DEPLOYED
	4/6/22 8:19	NUMEROUS VESSELS ESCORTED IN VICINITY OF VIGOR YARD, PAUSE SURVEY OPERATIONS THROUGHOUT THE DAY TO GIVE WAY
	4/6/22 11:44	RETRIVEAL OF SIDE SCAN GEAR
	4/6/22 12:30	TRANSIT TO GET FUEL
	4/6/22 12:56	45 GALLONS OF FUEL RECEIVE
	4/6/22 13:31	STARTING MAG SURVEY
	4/6/22 14:57	RECOVERED MAG GEAR
	4/6/22 14:58	IN TRANSIT TO FREDS MARINIA
POSPAC STOP	4/6/22 15:08	STOPPED POS LOGGING
	4/6/22 15:09	MOBILIZATION OF SUB BOTTOM PROFILER

Photo Number (assigned by camera, or 1, 2etc. but it then needs to be	Taken By (initials)	Description	Direction	Date	Time	GPS Coordinates		
in the filename)	(Initials)					Lat	Long	
20220404_113533	CRG	Ships in the Survey Area	W	4/4/2022	1135	45 deg 33' 52.80" N	45 deg 33' 52.80" N	
20220404_113546	CRG	Swan Island Basin Overview	S	4/4/2022	1135	45 deg 33' 52.80" N	122 deg 42' 44.34" W	
20220404_113627	CRG	Barges and Ships within Survey Limits	NE	4/4/2022	1136	45 deg 33' 54.37" N	122 deg 42' 47.38" W	
20220405_080627	CRG	Barges in Survey Area	NE	4/5/2022	0806	45 deg 33' 11.43" N	122 deg 43' 49.24" W	
20220405_080652	CRG	Barges in Survey Area	N	4/5/2022	0807	45 deg 33' 11.43" N	122 deg 43' 49.24" W	
20220405_092049	CRG	Piles and Deadhead in Northern Survey Area Shoreline	NW	4/5/2022	0921	45 deg 34' 14.23" N	122 deg 43' 21.13" W	
20220406_082050	CRG	Ship Being Removed from Vigor Dry-Dock	E	4/6/2022	0820	45 deg 37' 11.59" N	122 deg 48' 18.67" W	
20220406_134117	CRG	Magnetometer Towing Operations	NE	4/6/2022	1341	45 deg 34' 00.29" N	122 deg 43' 00.06" W	
20220406_173141	CRG	Rtk Daily Control "Check Out" Observation	E	4/6/2022	1731	45 deg 37' 10.58" N	122 deg 48' 18.63" W	

## SIB Surveys (Magnetometer, multi-beam, LiDAR) Photo Log

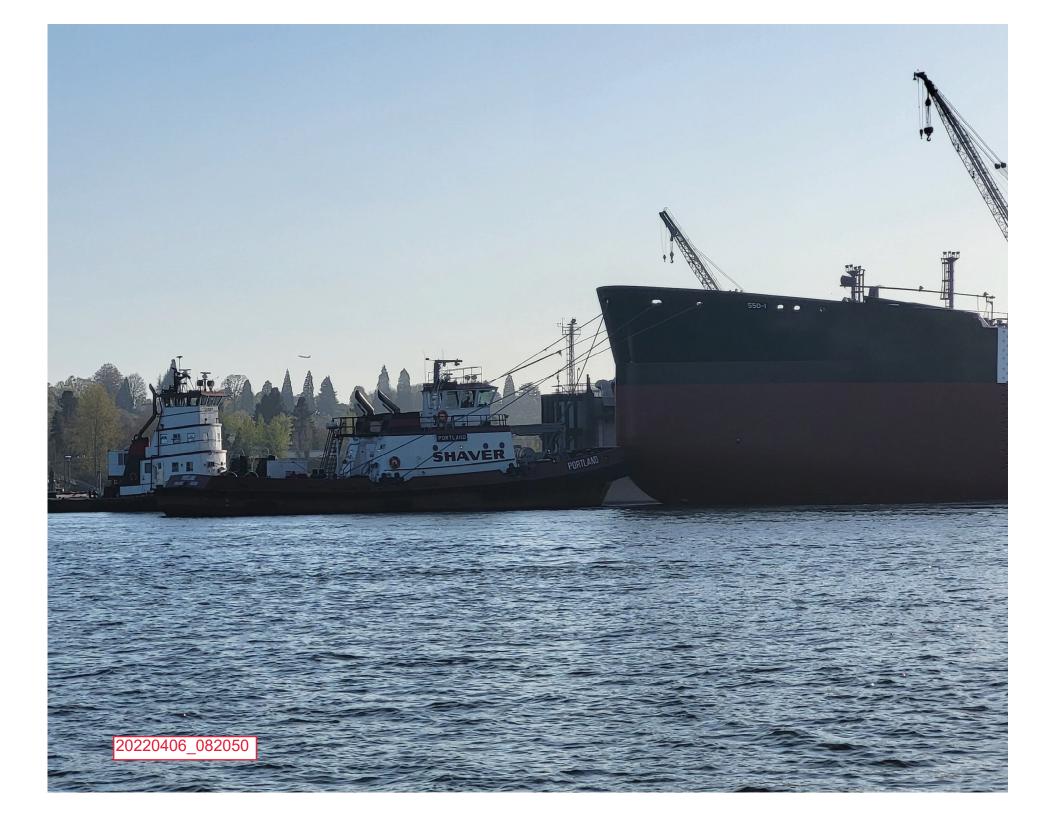







HydroGeoLogic, Inc Exceeding Expectations	<ul> <li>Pre-Tasi</li> <li>Site Safe</li> <li>Supervision</li> <li>Supervision</li> <li>UXO Awe</li> <li>Asbesto</li> </ul>	Hazard Analysis k Hazard Analys ety Orientation (r sor's (monthly) sor's (weekly) vareness os Awareness and Safety Plan A	is (prior to new task or operation) new personnel) Addendum:
Date/Time:			Client: DTNA / Vigor
Location: Swan Island Basin - Portla	1d Harbor Superfund S	Site	Job No.: DT2002
Meeting/training conducted by:	Trac Inc		
Work Activities: Hydrographic Surve	ying		
	Safety /	Training Topic	s Presented
Chemical Hazards:			
Physical Hazards: Slips and Falls			
Specific Safety Topic(s): Man-Ove			
Specific Training Covered: <u>How t</u>	o safely rescue person	nnel that may fall into t	he water during survey operations.
· · · · · ·			
		Attendees	
Name Printed and Employee	Number:	Si	gnature:
CODY GIBSON			
ADAM TAYLOR			
SAMANTHA CZWALINA			



DATE: \_\_\_\_\_ PLANNED ACTIVITY PERIOD:

04-07-2022 04-09-2022

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Weather:					Clear		
Temperature:					70°		
Wind:					0-10kts		
Humidity:					5%		

**PROJECT**: Portland Harbor Superfund Site - Swan Island Basin Project Area **CONTRACT NUMBER:** DT2002

### HGL Staff: None

**Teaming Partners/Subcontractors:** eTrac: Adam Taylor (Project Manager), Cody Gibson (Hydrographer), Samantha Czwalina (Hydrographer)

#### Regulatory Oversight: None

**Equipment On Site:** Survey Vessel Spectrum, AML BaseX2 Sound Velocity Probe, Riegl VZ400 LiDAR Scanner, Geometrics 882 Magnetometer, Innomar Sub-Bottom

#### Work Performed by PDI Activity:

Bathymetric and Geophysical Survey

- 1) RTK Control Work
- 2) Collection of Mobile Laser Scan Data
- 3) Collection of Sub-Bottom Profiler Data

### Quality Control Activities (including field calibrations):N/A

**Health and Safety Activities:** Daily safety briefing – Mobilization of LiDAR Sensor and Safe Launch/Retrieval of Sub-Bottom Profiler

## Problems Encountered/Corrective Action Taken: None

### Special Notes:

### Other Possible Documentation:

- No deviations from the PDI-WP (if yes, describe in *Problems Encountered/Corrective Action Taken*)
- No samples collected (if yes, list above and provide sample sheets or spreadsheet of sample details)
- No calibrations performed (if yes, list above and provide calibration forms)
- No unusual events (if yes, describe above in *Special Notes*)
- □ No photographs taken (if yes, place jpgs on SP with the details (see Documentation Guidance) in a spreadsheet)
- No Field Measurements collected (if yes, provide them in *Work Performed by PDI Activity* above or provide a spreadsheet if measurements are numerous)

### Planned Activities for the Next Day:

Continuation of Magnetometer and Sub-bottom Surveys

Signature:

Title:

eTrac

eTrac Inc. 617 S Knik-Goose Bay Rd, Ste C Wasilla, AK 99654

p: (415) 462-0421 f: (415) 480-2032 www.etracinc.com


# Survey Field Notes:

ID	Time	Description
	4/7/22 11:20	SAM, ADAM AND CODY HEADING OUT FOR SURVEY. CONTROL WORK PERFORMED PRIOR TO VESSEL WORK
POSPAC START	4/7/22 12:15	ARRIVED ON SITE
	4/7/22 12:16	STARTED POS LOGGING, MOBILIZATION OF SUB-BOTTOM AND LIDAR
	4/7/22 12:25	MTLS + SUBBOTTOM STARTED LINE 228
	4/7/22 14:21	LINE 0237 BORESIGHT 90, LINE 0238 BORESIGHT 270, LINE 0239 BORESIGHT, LINE 0230 BORESIGHT
	4/7/22 17:02	GAMS
	4/7/22 17:47	SHUTDOWN VZ400 + SUBBOTTOM. SURVEY ENDED. LAST LINE LASER SCANNED 0262
	4/7/22 18:02	IN TRANSIT TO FREDS MARINIA
POSPAC STOP	4/7/22 18:02	STOPPED POS LOGGING

Photo Number (assigned by camera, or 1, 2etc. but it then needs to be	Taken By (initials)	Description	Direction	Date	Time	GPS Coordinates	
in the filename)	(Initials)	liais)				Lat	Long
20220404_113533	CRG	Ships in the Survey Area	W	4/4/2022	1135	45 deg 33' 52.80" N	45 deg 33' 52.80" N
20220404_113546	CRG	Swan Island Basin Overview	S	4/4/2022	1135	45 deg 33' 52.80" N	122 deg 42' 44.34" W
20220404_113627	CRG	Barges and Ships within Survey Limits	NE	4/4/2022	1136	45 deg 33' 54.37" N	122 deg 42' 47.38" W
20220405_080627	CRG	Barges in Survey Area	NE	4/5/2022	0806	45 deg 33' 11.43" N	122 deg 43' 49.24" W
20220405_080652	CRG	Barges in Survey Area	N	4/5/2022	0807	45 deg 33' 11.43" N	122 deg 43' 49.24" W
20220405_092049	CRG	Piles and Deadhead in Northern Survey Area Shoreline	NW	4/5/2022	0921	45 deg 34' 14.23" N	122 deg 43' 21.13" W
20220406_082050	CRG	Ship Being Removed from Vigor Dry-Dock	E	4/6/2022	0820	45 deg 37' 11.59" N	122 deg 48' 18.67" W
20220406_134117	CRG	Magnetometer Towing Operations	NE	4/6/2022	1341	45 deg 34' 00.29" N	122 deg 43' 00.06" W
20220406_173141	CRG	Rtk Daily Control "Check Out" Observation	E	4/6/2022	1731	45 deg 37' 10.58" N	122 deg 48' 18.63" W
20220406_082050	CRG	Ship Being Removed from Vigor Dry-Dock	E	4/6/2022	0820	45 deg 37' 11.59" N	122 deg 48' 18.67" W
20220406_134117	CRG	Magnetometer Towing Operations	NE	4/6/2022	0:00	45 deg 34' 00.29" N	122 deg 43' 00.06" W
20220406_173141	CRG	Rtk Daily Control "Check Out" Observation	E	4/6/2022	0:00	45 deg 37' 10.58" N	122 deg 48' 18.63" W
20220407_102151	CRG	Control Work on Ngs Benchmark "Wall 1961"	W	4/7/2022	0:00	45 deg 34' 30.83" N	122 deg 42' 49.39" W
20220407_141457	CRG	Mobile Lidar Scanning	W	4/7/2022	0:00	45 deg 35' 26.79" N	122 deg 45' 19.13" W
20220407_142332	CRG	Ship Entering Vigor Dry Dock	W	4/7/2022	0:00	45 deg 35' 26.79" N	122 deg 45' 19.13" W

SIB Surveys (Magnetometer, multi-beam, LiDAR) Photo Log



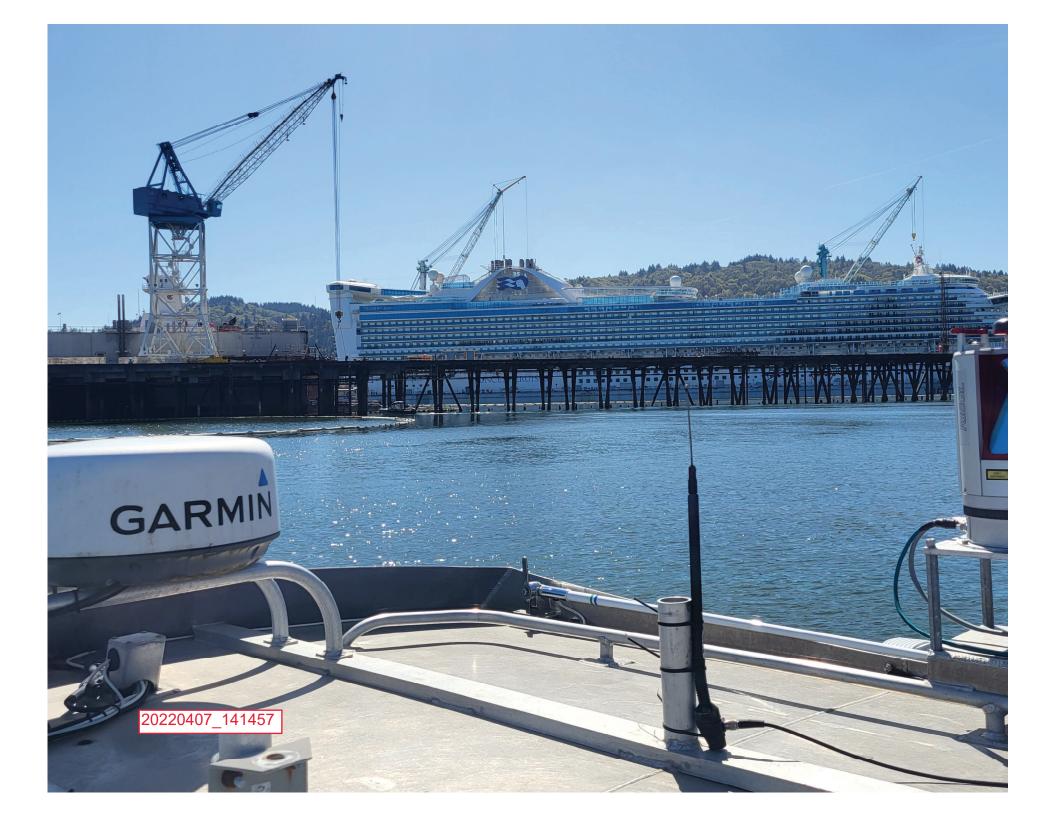





HydroGeoLogic, Inc Exceeding Expectations	□ Activit □ Pre-Ta □ Site S □ Super □ Super □ UXO A □ Asbes	afety Orientation visor's (monthly) visor's (weekly) Awareness tos Awareness and Safety Plan	sis (prior to new task or operation)
Date/Time: 4-4-2022			Client: DTNA / Vigor
Location: Swan Island Basin - Portla	nd Harbor Superfun	d Site	Job No.: DT2002
Meeting/training conducted by:	Trac Inc		_
Work Activities: Hydrographic Surve	eying		
	Safety	y / Training Topi	cs Presented
Chemical Hazards:			
Physical Hazards: Slips and Falls			
Specific Safety Topic(s): Man-Ove			
Specific Training Covered: <u>How t</u>	o safely rescue pers	sonnel that may fall into	the water during survey operations.
		Attendees	3
Name Printed and Employee	Number:	\$	Signature:
CODY GIBSON			
ADAM TAYLOR			
SAMANTHA CZWALINA			



DATE: \_\_\_\_ PLANNED ACTIVITY PERIOD:

04-08-2022

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
Weather:						Cloudy	
Temperature:						50°	
Wind:						10-15kts	
Humidity:						50%	

**PROJECT**: Portland Harbor Superfund Site - Swan Island Basin Project Area **CONTRACT NUMBER:** DT2002

#### HGL Staff: None

**Teaming Partners/Subcontractors:** eTrac: Adam Taylor (Project Manager), Cody Gibson (Hydrographer), Samantha Czwalina (Hydrographer)

#### Regulatory Oversight: None

**Equipment On Site:** Survey Vessel Spectrum, AML BaseX2 Sound Velocity Probe, Riegl VZ400 LiDAR Scanner, Geometrics 882 Magnetometer, Innomar Sub-Bottom

#### Work Performed by PDI Activity:

Bathymetric and Geophysical Survey

- 1) Collection of Sub-Bottom Profiler Data
- 2) Collection of Magnetometer Data

### Quality Control Activities (including field calibrations): N/A

Health and Safety Activities: Daily safety briefing –Safe Launch/Retrieval of Sub-Bottom Profiler and Magnetometer

## Problems Encountered/Corrective Action Taken: None

**Special Notes:** 

### Other Possible Documentation:

- No deviations from the PDI-WP (if yes, describe in *Problems Encountered/Corrective Action Taken*)
- No samples collected (if yes, list above and provide sample sheets or spreadsheet of sample details)
- No calibrations performed (if yes, list above and provide calibration forms)
- No unusual events (if yes, describe above in *Special Notes*)
- □ No photographs taken (if yes, place photos on SP with the details (see Documentation Guidance) in a spreadsheet)
- No Field Measurements collected (if yes, provide them in *Work Performed by PDI Activity* above or provide a spreadsheet if measurements are numerous)

## Planned Activities for the Next Day:

• Demobilization of Equipment from Vessel and Control Work

Signature:

Title: Field Coordinator

eTrac

eTrac Inc. 617 S Knik-Goose Bay Rd, Ste C Wasilla, AK 99654


p: (415) 462-0421 f: (415) 480-2032 www.etracinc.com


# Survey Field Notes:

ID	Time	Description
	4/8/22 6:50	SAM, ADAM AND CODY DEPARTING FRED'S MARINA
POSPAC START	4/8/22 7:20	ARRIVED ON SITE
	4/8/22 7:30	DEPLOY MAGNETOMETER AND SUB-BOTTOM PROFILER
	4/8/22 7:35	BEGIN COLLECTION OF SUB-BOTTOM AND MAGNETOMETER LINES
POSPAC STOP	4/8/22 16:35	END POSPAC LOGGING, RETRIEVE EQUIPMENT
	4/8/22 16:43	DEPART SWAN ISLAND AND TRANSIT TO FRED'S MARINA

Photo Number (assigned by camera, or 1, 2etc. but it then needs to be	Taken By (initials)	Description	Direction	Date	Time	GPS Coordinates	
in the filename)	(Initials)					Lat	Long
20220404_113533	CRG	Ships in the Survey Area	W	4/4/2022	1135	45 deg 33' 52.80" N	45 deg 33' 52.80" N
20220404_113546	CRG	Swan Island Basin Overview	S	4/4/2022	1135	45 deg 33' 52.80" N	122 deg 42' 44.34" W
20220404_113627	CRG	Barges and Ships within Survey Limits	NE	4/4/2022	1136	45 deg 33' 54.37" N	122 deg 42' 47.38" W
20220405_080627	CRG	Barges in Survey Area	NE	4/5/2022	0806	45 deg 33' 11.43" N	122 deg 43' 49.24" W
20220405_080652	CRG	Barges in Survey Area	N	4/5/2022	0807	45 deg 33' 11.43" N	122 deg 43' 49.24" W
20220405_092049	CRG	Piles and Deadhead in Northern Survey Area Shoreline	NW	4/5/2022	0921	45 deg 34' 14.23" N	122 deg 43' 21.13" W
20220406_082050	CRG	Ship Being Removed from Vigor Dry-Dock	E	4/6/2022	0820	45 deg 37' 11.59" N	122 deg 48' 18.67" W
20220406_134117	CRG	Magnetometer Towing Operations	NE	4/6/2022	1341	45 deg 34' 00.29" N	122 deg 43' 00.06" W
20220406_173141	CRG	Rtk Daily Control "Check Out" Observation	E	4/6/2022	1731	45 deg 37' 10.58" N	122 deg 48' 18.63" W
20220406_082050	CRG	Ship Being Removed from Vigor Dry-Dock	E	4/6/2022	0820	45 deg 37' 11.59" N	122 deg 48' 18.67" W
20220406_134117	CRG	Magnetometer Towing Operations	NE	4/6/2022	0:00	45 deg 34' 00.29" N	122 deg 43' 00.06" W
20220406_173141	CRG	Rtk Daily Control "Check Out" Observation	E	4/6/2022	0:00	45 deg 37' 10.58" N	122 deg 48' 18.63" W
20220407_102151	CRG	Control Work on Ngs Benchmark "Wall 1961"	W	4/7/2022	0:00	45 deg 34' 30.83" N	122 deg 42' 49.39" W
20220407_141457	CRG	Mobile Lidar Scanning	W	4/7/2022	0:00	45 deg 35' 26.79" N	122 deg 45' 19.13" W
20220407_142332	CRG	Ship Entering Vigor Dry Dock	W	4/7/2022	0:00	45 deg 35' 26.79" N	122 deg 45' 19.13" W
20220408_081530	CRG	Sub-Bottom Profiler Operations	SE	4/8/2022	0815	45 deg 33' 36.80" N	122 deg 43' 09.73" W
20220408_130829	CRG	Front Of Vigor Dry Dock with Large Ship	S	4/8/2022	1308	45 deg 34' 08.61" N	122 deg 43' 56.34" W
20220408_151605	CRG	Transient Sailboats within Swan Basin	SW	4/8/2022	1516	45 deg 33' 44.71" N	122 deg 42' 31.77" W

SIB Surveys (Magnetometer, multi-beam, LiDAR) Photo Log

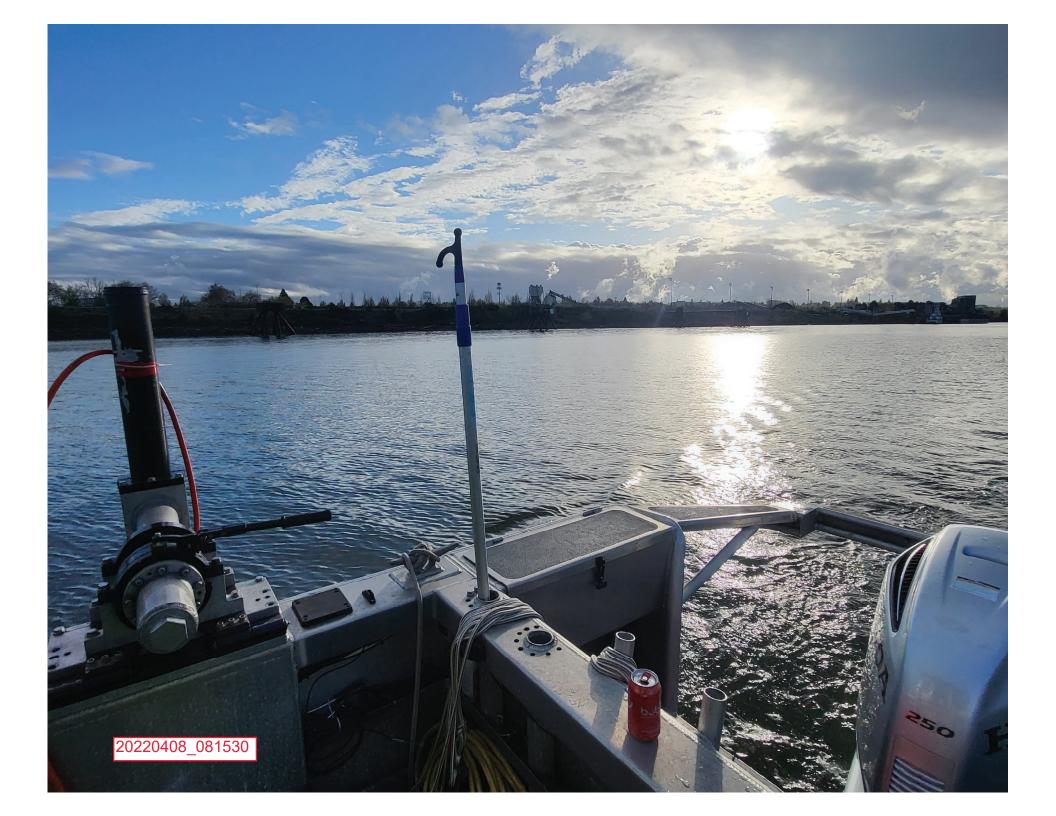

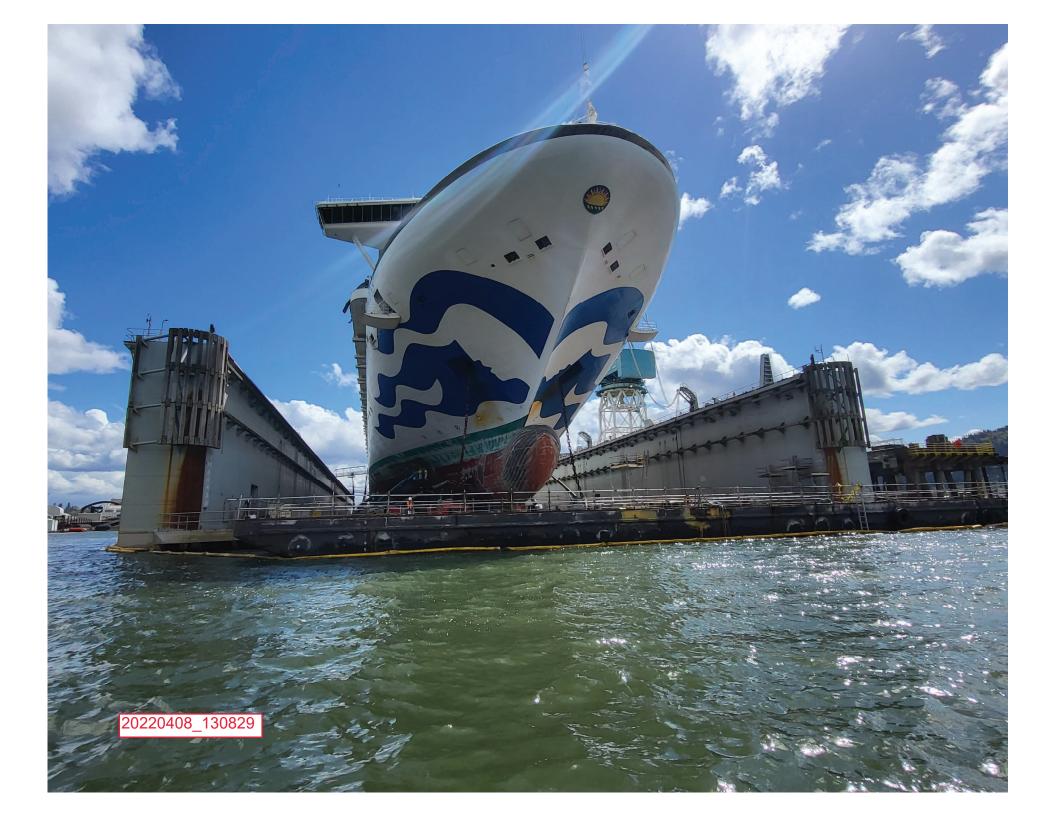





HydroGeoLogic, Inc Exceeding Expectations	□ Activit □ Pre-Ta □ Site S □ Super □ Super □ UXO A □ Asbes	afety Orientation visor's (monthly) visor's (weekly) Awareness tos Awareness and Safety Plan	sis (prior to new task or operation)
Date/Time: 4-4-2022			Client: DTNA / Vigor
Location: Swan Island Basin - Portla	nd Harbor Superfun	d Site	Job No.: DT2002
Meeting/training conducted by:	Trac Inc		_
Work Activities: Hydrographic Surve	eying		
	Safety	y / Training Topi	cs Presented
Chemical Hazards:			
Physical Hazards: Slips and Falls			
Specific Safety Topic(s): Man-Ove			
Specific Training Covered: <u>How t</u>	o safely rescue pers	sonnel that may fall into	the water during survey operations.
		Attendees	3
Name Printed and Employee	Number:	\$	Signature:
CODY GIBSON			
ADAM TAYLOR			
SAMANTHA CZWALINA			

# **ATTACHMENT B**

# ELECTRONIC DATA DELIVERABLE

The complete multibeam bathymetry survey dataset is available at this link: <u>Bathymetric Survey Report - OneDrive (sharepoint.com)</u> This page was intentionally left blank.